AN ABSTRACT OF A DISSERTATION

MULTIPORT HIGH FREQUENCY TRANSFORMER COUPLED BIDIRECTIONAL DC-DC CONVERTERS FOR HYBRID RENEWABLE ENERGY SYSTEM

A Dissertation

Presented to

the Faculty of the Graduate School

Tennessee Technological University

by

Jianfu Fu

CERTIFICATE OF APPROVAL OF DISSERTATION

MULTIPORT HIGH FREQUENCY TRANSFORMER COUPLED BIDIRECTIONAL DC-DC CONVERTERS FOR HYBRID RENEWABLE ENERGY SYSTEM

By

Jianfu Fu

Graduate Advisory Committee:

Joseph Olorunfemi Ojo, Chairperson	Date
Ghadir Radman	Date
Ahmed Kamal	Date
Brian O'Connor	Date
Hwan-Sik Yoon	Date
Omar Elkeelany	Date

DEDICATION

This dissertation is dedicated to my dearest parents who never stop supporting me and encouraging me throughout my life.

Page

5.5.1 Modeling

LIST OF FIGURES

Page

Fig. 1.1 System structure for a micro-hydro generation system 2
Fig. 1.2 System structure for a power conditioning for wind generation system 3
Fig. 1.3 Photovoltaic power conditioning system 4
Fig. 1.4 Photovoltaic power conditioning system 6
Fig. 1.5 A typical single-phase unidirectional half-bridge dc-dc converter 8
Fig. 1.6 A typical single-phase bidirectional half-bridge dc-dc converter 9
Fig. 1.7 A typical single-phase unidirectional full bridge dc-dc converter 10
Fig. 1.8 Single-phase dual active bridge (DAB) dc-dc converter topology 10
Fig. 1.9 Three-port active bridge (DAB) dc-dc converter topology 11
Fig. 1.10 Block diagram of multiport DAB converter system 12
Fig. 2.1 Simplified single-phase DAB converter 23
Fig. 2.2 Equivalent circuit of DAB converter 23
Fig. 2.3 Operation mode of two rectangular waveforms 25
Fig. 2.4 Ideal waveform of operation Mode A 26
Fig. 2.5 Ideal waveform of operation Mode B 33
Fig. 2.6 Ideal waveform of operation Mode C 35
Fig. 2.7 Equivalent circuit of DAB converter without mutual inductance L_m 40
Fig. 2.8 Comparison of the instantaneous input current i_1 with and without L_m 42
Fig. 2.9 Comparison of the instantaneous input power P_1 with and without L_m 42
Fig. 2.10 The input current i_1 with L_m and without using L_m Simulink 43
Fig. 2.11 The input power P_1 using Simulink 43
Fig. 3.1 Ideal equivalent circuit of two-port DAB converter system 45
Fig. 3.2 Possible operation modes of two rectangular waveforms: (a) Mode A (b) Mode B; (c) Mode C 47
Fig. 3.3 The difference between V_1 and V_2 waveform over a half time period 49
Fig. 3.4 The input current I_1 waveform over a half time period 49

Page

Page

Fig. 4.12 Output dc voltage V_{dc} 82
Fig. 4.13 Output Power P_2 82
Fig. 4.14 Input current I_1 83
Fig. 4.15 Output dc voltage V_{dc} 83
Fig. 4.16 Instantaneous input current i_1 84
Fig. 4.17 Input ac current I_1 87
Fig. 4.18 Output ac current I_2 88
Fig. 4.19 Input power P_1 88
Fig. 4.20 Output power P_2 89
Fig. 4.21 Reactive power Q_1 89
Fig. 4.22 Output dc voltage V_{dc} 90
Fig. 4.23 Input dc current I_{dc} 90
Fig. 4.24 Operating points: (a) input current I vs. S_{d2}; (b) S_{d2} vs. S_{q2} (c) D_2 vs. Φ_2; 94
Fig. 4 25 Input current I vs. S_{d2} for obtaining minimum input current 95
Fig. 5.1 Multiport bidirectional dc-dc converter structure 101
Fig. 5.3 Simplified model of equivalent circuit of three-port converter system 109
Fig. 5.3 Output power P_3 when varying Φ_2, Φ_3 and D_3 .....

Page

Fig. 6.28 60° phase shift rectangular PWM ac voltage waveform 174
Fig. 7.1 Schematic of the two-port DAB converter system..... 176
Fig. 7.2 Photograph of the two-port DAB converter system..... 177
Fig. 7.3 Experimental results of the steady state operation of the two-port DAB converter with $D_1 = 1$, D_2

LIST OF TABLES

Page

Table 3.1 Resulting voltage drops during the time intervals in half switching cycle 56
Table 5.1 Results from GB technique 121
Table 5.2 Results from numerical iteration method 122
Table 5.3 Parameters for the four winding transformer..... 133
Table 5.4 Parameters of control variables for four DAB converter system..... 133
Table 5.5 Parameters for the four winding transformer..... 146
Table 5.6 Results from GB technique..... 146
Table 6.1 Specifications of the 20k Hz high frequency transformer 157
Table 6.2 Specifications of the magnetic core 159
Table 6.3 Specifications of the built transformer..... 163
Table 6.4 Specifications of the auxiliary inductor 166

sources. The following alternative energy sources introduced are widely developed clean electricity generation systems.

1.1.1 Hydro Energy

Over the last 100 years, hydro power has been the most mature renewable energy source generating electricity around the world [3,4]. The hydroelectric energy takes a large amount and is still being exploited. Hydro power generation using rivers and dams has been recognized as an excellent source of renewable energy source. Hydro power depends on the kinetic energy of a flowing fluid to generate electricity. The structure of a micro-hydro generation system is shown in Fig. 1.1. There is an increase of interest in the U.S.A. to harness the main rivers such as the Mississippi River. However, considering the environmental damage and risk of relocation of human beings, it becomes more difficult to be constructed due to the political issues. After that it comes with the wind energy, solar energy, and fuel cells. Hence, these areas will take a greater amount of the electricity generation mix to break the dependence on oil and coals.

Fig. 1.1 System structure for a micro-hydro generation system

1.1.2 Wind Energy

The amount of the wind energy is infinite. It is clean, renewable, and widely distributed. Wind energy is the next most popular source of green energy around the world. The wind electricity has been commercialized for the last decades [3]. The wind energy production forecast by 2011 is more than 200 GW. The European Wind Energy Association (EWEA) projects 150,000 MW by 2020. The United States holds the second largest share of wind power in the world followed by China and India where the wind industry is also booming. Wind turbines are widely used to convert the kinetic wind aerodynamic energy into electricity. Different scales of the wind turbines can be utilized from a few hundred watts residential use to several megawatt electric grid utility. The stru(W)-6(ih)-10(y)3.-1(l)-kine2(s)-1(r)3(e)4(s)-1(i)-2(de)4(nt)-2(i)-2(a)4(l)-2(us)-1uyW>-1uyWy(i)-2(

1.1.3 Solar Energy

Solar energy, heat coming from the sun, has been harnessed by human beings and considered a truly renewable energy source. By using photovoltaic and heat engine, sunlight can be converted into electricity. The conventional PV with power conditioning system is shown in Fig. 1.3. This green energy-solar photovoltaic is growing rapidly, even though in a small base, to a total global capacity of 40,000 MW at the end of 2010. The simplicity of the technology and flexibility of installation make PV a greater potential for worldwide growth. So far substantial research and development (R&D)

Fig. 1.4

In conclusion, dc-dc converters play a very important role in the application of renewable energy system and it's practically utilization. They ensure the efficient and flexible interconnection of different energy storage systems and loads. In the following study, the focus is on the dc-dc converter systems.

1.2 Literature Review

With the increasing concern about over-consumption of non-renewable resources, the development of renewable energy sources has taken on an accelerated pace. The main advantages of using renewable energy sources are the low harmful emissions such as CO_2, high operation efficiencie,s and inexhaustible resources. However, some issues such

the renewabl(on)-n[(p)-4(er)-11(g)-142y so1urces

1.2.1 Topology Review for DC-DC Converters

Recently the dc-dc converter has emerged as an important energy conversion system in the application of renewable energy generating systems such as fuel cells and photovoltaic (PV) array [9,14,29,30]. Applications such as unidirectional, bidirectional power conversion, high power isolated, single-phase half-bridge, and full dual-active-bridge (DAB) dc-dc converters have received more and more attention. They have merits of compact size and light weight, electrical isolation between source and load, bidirectional power flow for charging and discharging the battery system. The use of a high frequency transformer offers a large step upoe cev(e)4(r)3(s)-2(i)-2(o7())-7(w)-8( ))-7(w)3 7(w)e)i8

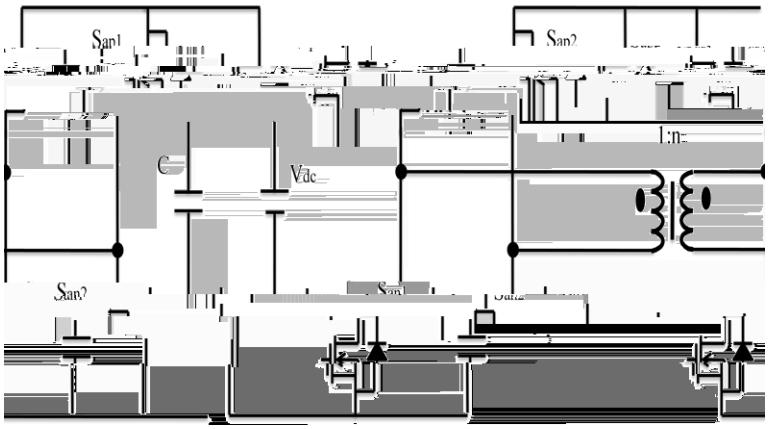

Fig. 1.6 A typical single-phase bidirectional half-bridge dc-dc converter

has the advantage of low device voltage and low device count; however, it may not be good choice because of the double current going through the semiconductor device and the split capacitors with potential unbalanced voltage issues.

By replacing the diodes of the secondary rectifier stage in the unidirectional topology of Fig. 1.5, bidirectional power flow can be achieved as shown in Fig. 1.6. It enables the charging and discharging by phase shifting the voltages operated on the primary and secondary side. Still, this topology is intended for the low power applications due to the low count of the semiconductor devices.

1.2.1.2 Single-phase full-bridge dc-dc converter. Some primary sources like fuel cells cannot absorb power. Hence the converter does not need to be bidirectional for this case. The single-phase unidirectional full bridge dc-dc converter is illustrated in Fig. 1.7. It can be operated by both phase shift and duty ratio control signals to acquire the reasonable voltage. Also, zero voltage switching (ZVS) can be realized in a limited load and input voltage range [10].

Fig. 1.7 A typical single-phase unidirectional full bridge dc-dc converter

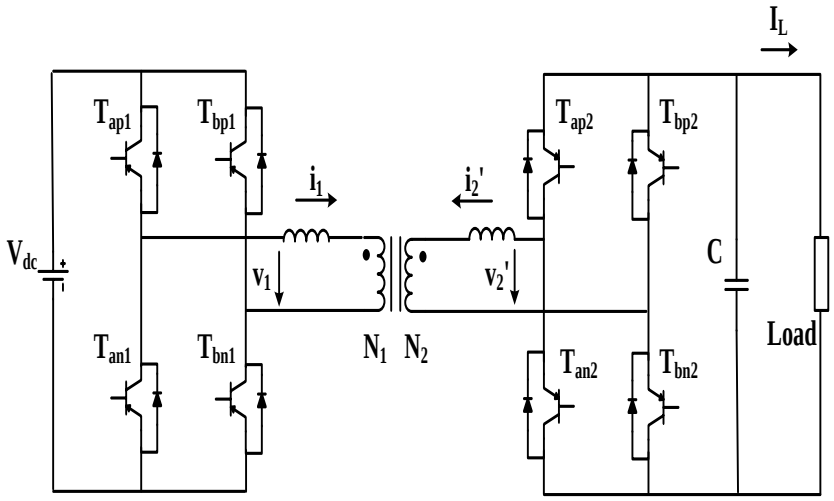

Figure 1.8 Single-phase dual active bridge (DAB) dc-dc converter topology

Single-phase bidirectional dc-dc converter topology shown in Fig. 1.8 is possibly the most popular topology for bidirectional applications. It was first proposed in [30]. This topology is also studied in [10] and called dual-active-bridge (DAB) dc-dc converter.

The two individual single-phase converters are coupled as the primary and secondary side of a high frequency transformer with a turn ratio of N_1/N_2. The ac voltage v_1 and v_2'

a backup component to supply peak power requirement. Hence, with an extra auxiliary power supply, the dynamics of the system can be improved and it increases the fault tolerant capability. In this regard, derived from traditional bidirectional dc-dc converter structure, the three-port bidirectional dc-dc converters have been reported in [21-26].

1.2.1.4 Multiport active bridge dc-dc converter. Recently, future energy systems have needed to interface various energy sources such as fuel cells and photovoltaic (PV) with various loads. Multiport active bridge dc-dc converters shown in Fig. 1.10 can be used to interface multiple power sources and multiple loads [35]. Due to the intermittent nature of solar and wind energy and slow dynamic response of fuel cell, the battery type backup is necessary and capable of long-term storing of energy.

Each single port of DAB is connected by an isolated high frequency transformer. Hence, developing multiport dc-dc converters is a new trend and gaining concerns in sustainable energy system and hybrid electric vehicles.

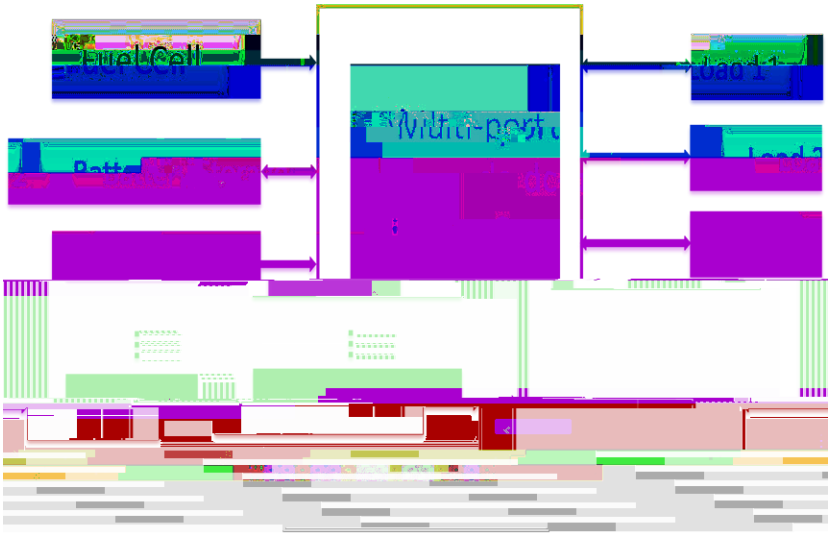

Fig. 1.10 Block diagram of multiport DAB converter system

1.2.2 State of the Art Bidirectional DC-DC Converters

In the literature, the isolated dual active bridge converter was originally studied in [29]. It is a galvanic buck and boost bidirectional dc-dc converter with a high frequency transformer. The two individual single-phase converters are operated with phase shift PWM waveforms which enable the bidirectional power flow. It has the advantage of low

condition where there is no power flow among the ports. A proportional multi-resonant

Last, but not the least, the preliminary laboratory prototype is built up with the rating of 1 kW at 20 kHz. Some of the components need to be designed after the specifications of the

Chapter 4 illustrates the proposed approach using the converter switching functions and harmonic balance technique (HBT) to modeling and analyzing the DAB system. The separate state variable equations generated using HBT are used to determine the minimum loss operation of proposed system.

Chapter 5 extends the HBT method into the

CHAPTER 2

specified. Also the parameters of the system state variables are set as well as the input energy source is given. Then, the state equations to analyze the characteristics of the state variables can be solved.

The state equations can be written as

$$\begin{cases} \quad = \quad + \\ \quad = \quad + \end{cases}$$

converter topology analyzed in this section is as shown in Fig. 2.1. It has attractive advantages such as low switching losses, optimal bidirectional power flow and galvanic isolation between source and load. It shows two single-phase full bridge converters on the two sides of a transformer.

The two rectangular wave voltages, v_1 and v_2, can be regulated by varying duty ratio and phase shift to transfer the required power. The inductor L representing the sum of the primary-referred leakage inductance and external inductor is used as energy storage and transfer component.

Fig. 2.1 Simplified single-phase DAB converter

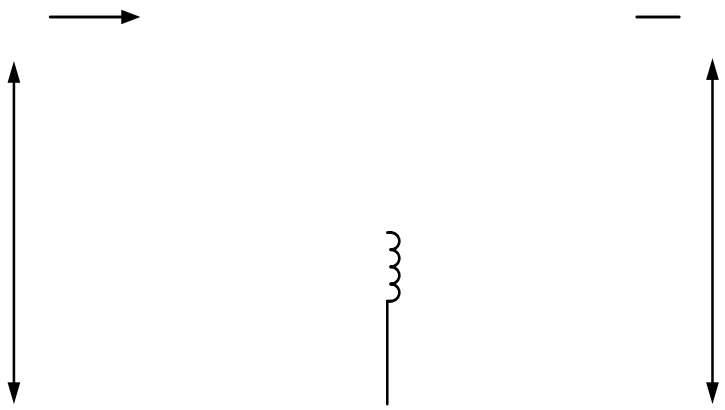

D^{π} L. The Modal Absorption (see Figure 2.4) into four states

which can make this nonlinear system into four linear systems with each state space equation.

1) At the time interval 0 to t_1 $1 \quad 1 \quad dc \quad 2$ the time is 10

2) At the time interval t_1 to t_2 $2 \quad 1 \quad dc \quad 2$ the time is t_{21}

3) At the time interval t_2 to 3 $3 \quad 1 \quad dc \quad 2$ the time is 32

4) At the time interval 3 to t_4 $4 \quad 1 \quad dc \quad 2$

The [ ]

It is known $X[t_3]_o = X[t_2]$ and $t_{32} = t_3 - t_2 = [-\varphi + \frac{\pi}{2}(D_1 - D_2)] \cdot \frac{T}{2\pi}$

The $X[t_3]$ can be expressed in terms of $X[t_2]$:

2) At the time interval t_1 to t_2 $\theta_2 : V_1 = V_{dc}, s_2 = 1$ the time is t_{21}

3) At the time interval t_2 to t_3 : 1 Tf0,10.8 10

It is known $X[t_2]_0 = X[t_1]$ and $t_{21} = t_2 - t_1 = \dfrac{-\varphi + \dfrac{\pi}{2}(D_1 + D_2)}{\pi} \cdot \dfrac{T}{2}$

The $X[t_2]$ can be expressed in terms of $X[t_1]$ which is same as the Equation (2.28).

3) At the time interval t_2 to t_3 $\theta_3 : V_1 = 0, s_2 = 1$ the time is t_{32}

It is known $X[t_3]_o = X[t_2]$ and $t_{32} = t_3 - t_2 = \dfrac{\varphi - \dfrac{\pi}{2}(D_1 - D_2)}{\pi} \cdot \dfrac{T}{2}$

As the input voltage

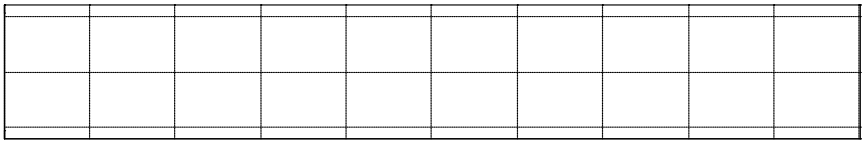

Fig. 2.6 Ideal waveform of operation Mode C

Mode C (see Fig. 2.6) $\pi(D_1 - D_2) \le \varphi \le \frac{\pi}{2}(2 - D_1 - D_2)$. This can be separated into four states which can make this nonlinear system into four linear systems with each state space equation.

1) At the time interval 0 to t_1 $\theta_1 : V_1 = V_{dc}, s_2 = -1$ the time is t_{10}

2) At the time interval t_1 to t_2 $\theta_2 : V_1 = V_{dc}, s_2 = 0$ the time is t_{21}

3) At the time interval t_2 to t_3 $\theta_3 : V_1 = V_{dc}, s_2 = 1$ the time is t_{32}

4) At the time interval t_3 to t_4 $\theta_4 : V_1 = 0, s_2 = 1$ the time is t_{43}

Similarly the steps of calculation are like the ones in Modes A and B. Substitute the values of input vectors s_2 and V_1 for each time interval, calculate the integral parts and rearrange the equation as follows:

1) At the time interval 0 to t_1 $\theta_1 : V_1 = V_{dc}, s_2 = -1$ the time is t_{10}

It is known $X[0] = -X[t_4]$ and $t_{10} = t_1 - t_o = \dfrac{\varphi + \frac{\pi}{2}(D_1 - D_2)}{\pi} \cdot \dfrac{T}{2}$

The $X[t_1]$ can be expressed in terms of $X[t_0]$ which is same as the Equation (2.27).

$$X[t_1]=\begin{bmatrix} e^{kt_{10}}[\cos(\omega_r t_{10})+a\sin(\omega_r t_{10})] & ce^{kt_{10}}\sin(\omega_r t_{10}) \\ de^{kt_{10}}\sin(\omega_r t_{10}) & e^{kt_{10}}[\cos(\omega_r t_{10})+b\sin(\omega_r t_{10})] \end{bmatrix} X[0]$$

$$-\begin{bmatrix} B_1[\frac{k}{k^2+\omega_r{}^2}-\frac{\omega_r}{k^2+\omega_r{}^2}e^{kt_{10}}\sin(\omega_r t_{10})-\frac{k}{k^2+\omega_r{}^2}e^{kt_{10}}\cos(\omega_r t_{10})] \\ +(B_1a+B_2c)[-\frac{\omega_r}{k^2+\omega_r{}^2}+\frac{\omega_r}{k^2+\omega_r{}^2}e^{kt_{10}}\cos(\omega_r t_{10})-\frac{k}{k^2+\omega_r{}^2}e^{kt_{10}}\sin(\omega_r t_{10})] \\ B_2[\frac{k}{k^2+\omega_r{}^2}-\frac{\omega_r}{k^2+\omega_r{}^2}e^{kt_{10}}\sin(\omega_r t_{10})-\frac{k}{k^2+\omega_r{}^2}e^{kt_{10}}\cos(\omega_r t_{10})] \\ +(B_2b+B_1d)[-\frac{\omega_r}{k^2+\omega_r{}^2}+\frac{\omega_r}{k^2+\omega_r{}^2}e^{kt_{10}}\cos(\omega_r t_{10})-\frac{k}{k^2+\omega_r{}^2}e^{kt_{10}}\sin(\omega_r t_{10})] \end{bmatrix} \quad (2.43)$$

2) At the time interval t_1 to t_2 $\theta_2 : V_1 = V_{dc}, s_2 = 0$ the time is t_{21}

It is known $X[t_2]_0 = X[t_1]$ and $t_{21} = t_2 - t_1 = \dfrac{-\varphi + \frac{\pi}{2}(D_1 + D_2)}{\pi} \cdot \dfrac{T}{2}$

The $X[t_2]$ can be expressed in terms of $X[t_1]$ which is same as the Equation (2.28). expressed in terms of

$$X[t_3]=\begin{bmatrix} e^{kt_{32}}[\cos(\ _r t_{32})+a\sin(\ _r t_{32})] & ce^{kt_{32}}\sin(\ _r t_{32}) \\ de^{kt_{32}}\sin(\ _r t_{32}) & e^{kt_{32}}[\cos(\omega_r t_{32})+b\sin(\omega_r t_{32})] \end{bmatrix} X[t_2]$$

$$-\begin{bmatrix} B_1[\frac{k}{k^2+\omega_r^{\ 2}}-\frac{\omega_r}{k^2+\omega_r^{\ 2}}e^{kt_{32}}\sin(\omega_r t_{32})-\frac{k}{k^2+\omega_r^{\ 2}}e^{kt_{32}}\cos(\omega_r t_{32})] \\ +(B_1a+B_2c)[-\frac{\omega_r}{k^2+\omega_r^{\ 2}}+\frac{\omega_r}{k^2+\omega_r^{\ 2}}e^{kt_{32}}\cos(\omega_r t_{32})-\frac{k}{k^2+\omega_r^{\ 2}}e^{kt_{32}}\sin(\omega_r t_{32})] \\ B_2[\frac{k}{k^2+\omega_r^{\ 2}}-\frac{\omega_r}{k^2+\omega_r^{\ 2}}e^{kt_{32}}\sin(\omega_r t_{32})-\frac{k}{k^2+\omega_r^{\ 2}}e^{kt_{32}}\cos(\omega_r t_{32})] \\ +(B_2b+B_1d)[-\frac{\omega_r}{k^2+\omega_r^{\ 2}}+\frac{\omega_r}{k^2+\omega_r^{\ 2}}e^{kt_{32}}\cos(\omega_r t_{32})-\frac{k}{k^2+\omega_r^{\ 2}}e^{kt_{32}}\sin(\omega_r t_{32})] \end{bmatrix}$$

The system is generalized in terms of state space equation at any time interval for each mode:

$$X[t]=\begin{bmatrix} X_1 e^{kw_1(t-t_{i-1})}-Y_1 e^{kw_1(t-t_{i-1})} & Z_1 e^{kw_1(t-t_{i-1})}-Z_1 e^{kw_2(t-t_{i-1})} \\ Z_1 e^{kw_1(t-t_{i-1})}-Z_1 e^{kw_2(t-t_{i-1})} & X_2 e^{kw_1(t-t_{i-1})}-Y_2 e^{kw_2(t-t_{i-1})} \end{bmatrix} X[t_{i-1}]$$
$$-\begin{bmatrix} \frac{B_1X_1+B_2Z_1}{kw_1}(1-e^{kw_1(t-t_{i-1})})-\frac{B_1Y_1+B_2Z_1}{kw_2}(1-e^{kw_2(t-t_{i-1})}) \\ \frac{B_1Z_2+B_2X_2}{kw_1}(1-e^{kw_1(t-t_{i-1})})-\frac{B_1Z_2+B_2Y_2}{kw_2}(1-e^{kw_2(t-t_{i-1})}) \end{bmatrix} \quad (2.47)$$

where

$$a_{11}=\frac{-r_1}{L_m+L_1-\frac{L_m^2}{L_m+L_2}} \quad (2.48)$$

$$a_{12}=\frac{L_m(r_2+{s_2}^2R)}{(L_m+L_2)(L_m+L_1)-L_m^2}$$

$$\omega_r = \sqrt{a_{11}a_{22} - a_{12}a_{21} - 0.25k^2} \tag{2.55}$$

$$X_1 = 1 + \frac{k - \omega_r - a_{22}}{2\omega_r} \tag{2.56}$$

When the source side converter impresses two rectangular voltage pulses on the

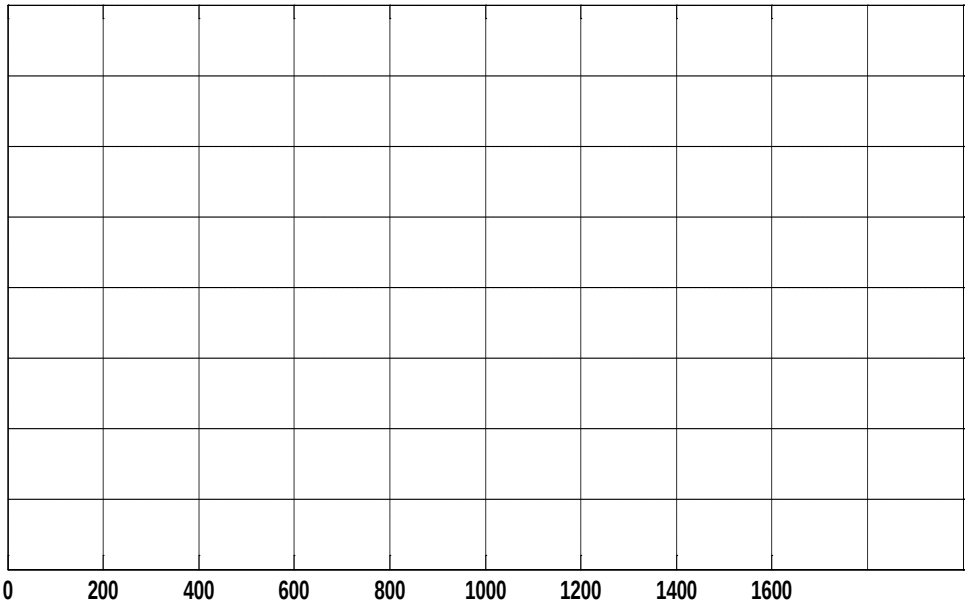

Fig. 2.8 Comparison of the instantaneous input current i_1 with and without L_m

Fig. 2.9 Comparison of the instantaneous input power P_1 with and without L_m

(b) Mode B, when

$$i_1(t_2) = i_1(t_1) + \frac{1}{L}(S_{12}V_{dc1} - S_{22}V_{dc2})t_{12} = i_1(t_o) + \frac{1}{L}(S_{11}V_{dc1} - S_{21}V_{dc2})t_{10} + \frac{1}{L}(S_{12}V_{dc1} - S_{22}V_{dc2})t_{12} \quad (3.11)$$

During the time instants $t_3 \sim t_4, V_{14}{}^{*} I_4$

$$i_1(t_o) = -\frac{1}{2}\left\{\frac{\pi}{\omega L}V_{dc1}\left(\frac{\varphi}{\pi}+\frac{1}{2}(D_1-D_2)\right)+\frac{\pi}{\omega L}(V_{dc1}-V_{dc2})D_2+\frac{\pi}{\omega L}V_{dc1}\left(-\frac{\varphi}{\pi}+\frac{1}{2}(D_1-D_2)\right)\right\} \quad (3.19)$$

Fig. 3.3 The difference between V_1 and V_2 waveform over a half time period

Fig. 3.4 The input current I_1

$$i_1(t_o) = -\left\{V_{dc1}\frac{\pi}{2\omega L}(\frac{\varphi}{\pi}+\frac{1}{2}(D_1-D_2))+\frac{\pi}{2\omega L}(V_{dc1}-V_{dc2})(-\frac{\varphi}{\pi}+\frac{1}{2}(D_1+D_2))-\frac{\pi}{2\omega L}V_{dc2}(\frac{\varphi}{\pi}-\frac{1}{2}(D_1-D_2))\right\} \quad (3.25)$$

Hence, the power flow equation for Mode B is given by

$$P_1 = V_{dc1}V_{dc2}\frac{\pi}{2\omega L}[\frac{\varphi}{\pi}D_2+\frac{1}{2}D_1D_2-\frac{1}{2}D_2{}^2-(\frac{\varphi}{\pi})^2+\frac{\varphi}{\pi}D_1-\frac{1}{4}(D_1{}^2-D_2{}^2)] \quad (3.26)$$

The dynamic performance of the voltage drop on leakage inductance, input current, and real power between two ports is shown in Fig. 3.6 – Fig. 3.8.

Fig. 3.6 The difference between V_1 and V_2 waveform over a half time period V

Fig. 3.8 The real power P_1 waveform over a half time period

Mode C (see Fig. 3.2 (c)) shows the values of time intervals and state of switching functions are given by

Hence the power flow equation for Mode C is given by

$$P_1 = V_{dc1} V_{dc2} \frac{\pi}{2\omega L} \left\{ -2(\frac{\varphi}{\pi})^2 + \frac{\varphi}{\pi} 2 - \frac{1}{4}(2(D_1 - 1)^2 + 2(D_2 - 1)^2 \right\} \quad (3.32)$$

The dynamic performance of the voltage drop on leakage inductance, input current and real power between two ports is shown in Fig. 3.9 – Fig. 3.11.

So far, the calculation assumes that D_1 is greater than D_2 and the phase shift angle is greater than zero, the power flow equations can be generalized as follows:

Mode A: $P_1 = V_{dc1} V_{dc2} \frac{\varphi}{\omega L} D_2 \quad (3.33)$

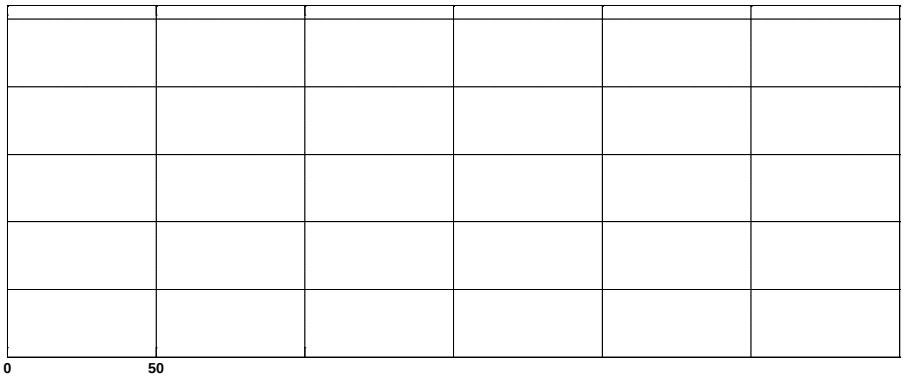

Fig. 3.9 The difference between V_1 and V_2 waveform over a half time period

Fig. 3.10 The input current I_1 waveform over a half time period

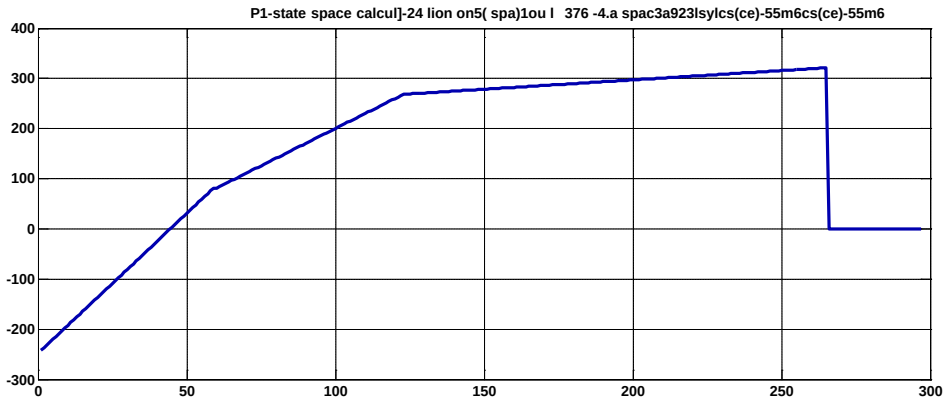

Fig. 3.11 The real power P_1 waveform over a half time period

Fig. 3.12 Φ vs. D_2 as power is fixed

By varying the phase angle shift Φ from 0 to 90 degrees, the relationship between D_2 and Φ can be shown in Fig. 3.12.

Mode B:
$$P_1 = V_{dc1}V_{dc2}\frac{\pi}{2\omega L}[(\frac{\varphi}{\pi}+\frac{1}{2}(D_1-D_2))D_2+(\frac{\varphi}{\pi}-\frac{1}{2}(D_1-D_2))\cdot(-\frac{\varphi}{\pi}+\frac{1}{2}(D_1+D_2))]$$
$$= V_{dc1}V_{dc2}\frac{1}{2\omega L}[-\frac{\varphi^2}{\pi}+\varphi(D_1+D_2)-\frac{\pi}{4}(D_1-D_2)^2)] \quad (3.34)$$

A quadratic equation based on the power equation above can be generated:

Fig. 3.13 Φ vs. D_1 and D_2 as power is fixed

$$^{2} - \quad (\ _{1} + \ _{2}) + \frac{^{2}}{4}(\ _{1} - \ _{2})^{2} + \ _{1}2 \qquad / \quad _{1} \quad _{2} = 0$$

time, the system under Mode B is studied. Based on each time switching state in half time period, the possibility and number of semiconductors turning on are laid out clearly as below. The MOSFET conduction model is simply a resistive drop with mΩ level. The resistive value of power MOSFET STP40NF10 is about 25 mΩ and body anti diode typically is 1 V forward voltage drop. Therefore, when the system is operating at a high frequency and high current situation, the power losses of the semiconductors are not trivial. In the following section, bas

3.4 State Space Analysis Considering Dead Time Effect

After considering the dead time effect, the original four states in half switching cycle have been changed to eight states. The calculation in each time interval can make this nonlinear system into eight linear systems with each state space equation.

1) At the time interval 0 to t_1 $\theta_1 : V_1 = V_{dc}/2, s_2 = 0$ the time is

(a) (b)

(c) (d)

(e)

Fig.

A full order model of the converter including the dead time switching functions is simulated using MATLAB/SIMULINK. As a proof of difference between the situations of state space model considering voltage drop and the simulation model without semiconductors voltage drop. The study case in the following part is studied. The duty ratios $D_1 = 0.8$ and $D_2 = 0.6$, phase shift angle is chosen as different cases $\Phi = 15°$, 30° and 60°.

To illustrate how the short time scale factors affect the output power, output dc voltage V_{dc}, output ac voltage V_{ac}, input current I_1 and input voltage V_1 by varying the phase shift angle Φ from 15°, 30°, and 60°, the minor parameters in DAB converter system such as dead time effect and semiconductor voltage drop have been discussed and the switching functions are revised considering the dead band and current waveform is studied (see Fig. 3. 17 – Fig. 3.19).

The simulation results show the effect of output power P, output dc voltage V_{dc}, output ac voltage V_{ac}, input current I_1, and input voltage V_1 by varying the phase shift angle Φ from 15°, 30° and 60° distorted by dead band and semiconductor voltage drop. They are compared and different from the ones derived from idealized lossless circuit. It can be seen that when the dead time is added, the steady state value and dynamic response of output power, output dc voltage and output ac voltage and voltage are all deteriorated.

presented a new approach of using HBT to acquire the sinusoidal steady state response of nonlinear system [48]. A more advanced and improved HBT was introduced by M. S.

It can be seen from the (3.37) and (3.38) that the term $e^{(jk\omega t)}$ is common to both sides of the equation; hence, it can be inferred that the constant coefficients on both sides are equal with the same effect of time variant variable $e^{(jk\omega t)}$. It can be represented as

4.2.1 Fourier Analysis of the Switching Functions

By using the harmonic balance technique in Equations (2.1) – (2.5), the state variables and switching functions are assumed to have average components and ripple quantities individually as below:

$$i_1 = I_{10} + \mathrm{Re}[I_1 e^{j\theta}] \tag{4.6}$$

$$i_2^{'} = I_{20} + \mathrm{Re}[I_2 e^{j\theta}] \tag{4.7}$$

$$V_{dcL} = V_{dc0} + \mathrm{Re}[V_{dc1} e^{j2\theta}] \tag{4.8}$$

$$s_1 = S_{10} + \mathrm{Re}[S_1 e^{j\theta}] \tag{4.9}$$

$$s_2 = S_{20} + \mathrm{Re}[S_2 e^{j\theta}] \tag{4.10}$$

In general, a repetitive non sinusoidal waveform f(t) repeating with an constant frequency ω can be expressed as [51]

$$f(t) = F_o + \sum_{h=1}^{\infty} f_h(t) = \frac{1}{2} a_o + \sum_{h=1}^{\infty} \{a_h \cos(h\omega t) + b_h \sin(h\omega t)\} \tag{4.11}$$

where –

(4521)

Similarly, derived is the expression of b_h

$$b \quad \frac{1}{\pi h}\left[\cos\frac{1}{2}h(-2\phi-\pi+D\pi) - \cos\frac{1}{2}h(2\phi \quad \pi+D\pi) - \cos\frac{1}{2}h(-2\phi \quad 3\pi+D\pi) \quad \cos\right| - \tag{4522}$$

when *h* is even

$$-\left[\quad - \quad - \left(\quad (\pi \quad \phi) \right| \right| \tag{4523}$$

when *h* is odd

$$-\left[\quad - \quad - \left(\quad - \quad \right| \right| \tag{4524}$$

when *h* is odd

$$b_h = \frac{4}{\pi h}\sin\frac{h\pi}{2}\sin - \tag{4525}$$

when *h* is even

(4526)

Therefore,

$$b_h = \begin{cases} \frac{4}{\pi h} \sin\frac{h\pi}{2} \sin\frac{1}{2} hD\pi \cos h\phi, & h = 1,3,5,7, \\ 0, & h = 2,4,6,8, \end{cases} \tag{4.27}$$

Thus the components of the Fourier analysis are expressed as below:

$$a_0 = 0 \tag{4.28}$$

$$a_h = \begin{cases} -\frac{4}{\pi h} \sin\frac{h\pi}{2} \sin\frac{hD\pi}{2} \sin h\phi, & for\ h = 1,3,5,7, \\ 0, & for\ h = 2,4,6,8, \end{cases} \tag{4.29}$$

Bring the complex expressions into the matrix above and separate them into real and imaginary part, rearrange the equations:

The ripple can be gotten as below:

$$\frac{1}{2}\mathrm{Re}[I_1 S_1 e^{j2\theta}] + \frac{1}{2}\mathrm{Re}[S_{13} I_1^{*} e^{j2\theta}] = \mathrm{Re}[I_{dc2} e^{j2\theta}] \tag{4.58}$$

$$I_{dc2} = \frac{1}{2}(I_1 S_1 + S_{13} I_1^{*}) \tag{4.59}$$

The steady state characteristics based on the input current I_1, input voltage V_1, output current I_2', output load voltage V_{dc2}, real input and output power P_1, P_2 and reactive power Q are studied and shown in Fig. 4.3.

The results are obtained by fixing D_1 = 0.8 and Φ_1 = 0 while varying the phase angle Φ_2 at D_2 is equal to 0.2, 0.4, 0.6 and 0.8. The parameters used are from a prototype transformer and given as follows: r_1 = 0.03Ω, L_1 = 5.85μH, r_2 = 0.005Ω, L_2 = 1.35μH, L_m = 185μH, f = 10k Hz, R = 2.5 Ω.

The input, output power, reactive power and output dc voltage are plotted versus phase shift at different duty ratios in Fig. 4.3 (a), (b), (c) and (d). From Fig. 4.3 (b), the real power flow is increased as phase shift angle increases. When duty ratio is decreased, less power is transferred at a given phase shift compared with the traditional only phase shift control. It also clearly shows that the system can draw more reactive power when phase shift angle is leading. As Fig. 4.3 (c) shows, to minimize the reactive power, it is better to set a constraint region of phase shift angle for minimum loss. Therefore limiting the phase angle range, it can increase the overall system efficiency.

4.2.3 Verification of Steady State Results by HBT

To verify the steady state results predicted by the harmonic balance technique, the simulation results using the dynamic equations of the proposed system generated using MATLAB/SIMULINK/Simulink are compared with them and are shown from Fig. 4.4 to Fig. 4.15. The harmonic balance technique largely predicts the performance of thect <</Atedife

=

0.8, D_2 =0.8, ((m)3)=A1, D=D8 and ((m)4)=A0.8,D =0.6. Var the phase angle Φ

90° to 90°when fixing Φ

= 0.005Ω, output leakage inductance

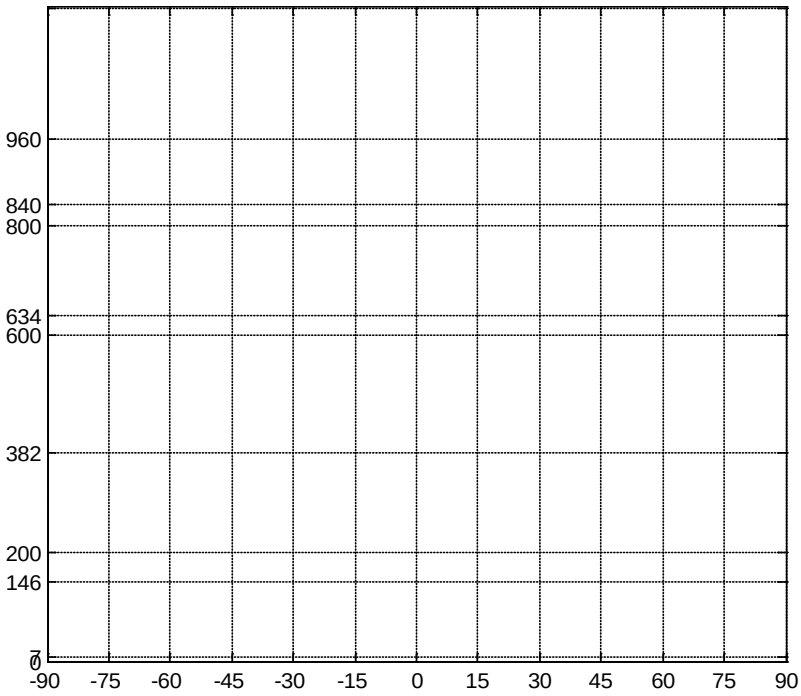

Fig. 4.4 Output Power P_2

Fig. 4.5 Input current I_1

Fig. 4.8 Input current I_1

Fig. 4.9 Output dc voltage V_{dc}

In Study Case (3):

$D_1 = 1, D_2 = 0.8 \; \phi = -90^\circ, -75^\circ, -60^\circ, -45^\circ, -30^\circ, -15^\circ, 0^\circ, 15^\circ, 30^\circ, 45^\circ, 60^\circ, 75^\circ, 90^\circ$

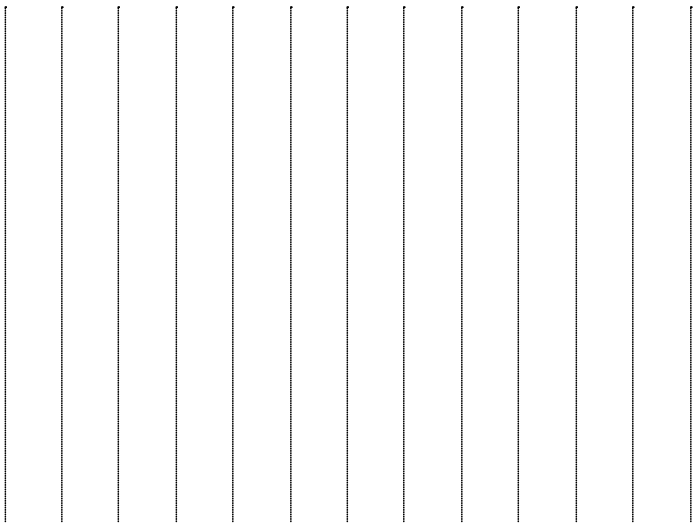

Fig. 4.10 Output Power P_2

Fig. 4.11 Input current I_1

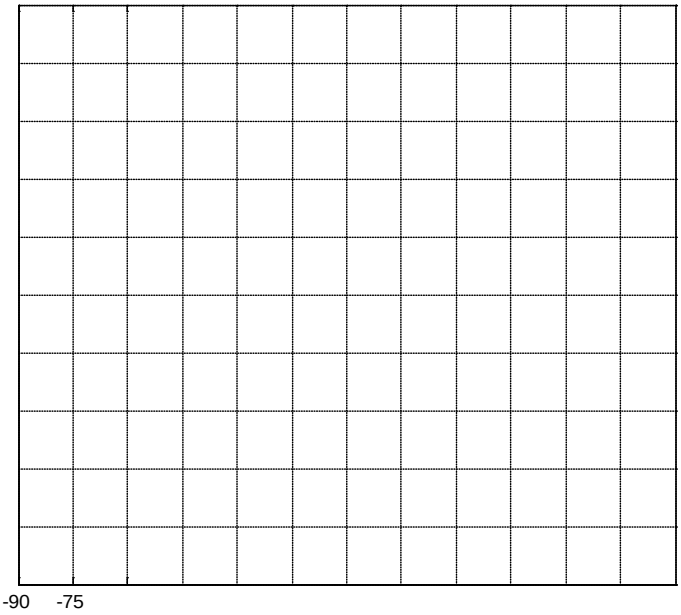

Fig. 4.12 Output dc voltage V_{dc}

In Study Case (4):

$D_1 = 0.8$, $D_2 = 0.6$ $\phi = -90^{\circ}, -75^{\circ}, -60^{\circ}, -45^{\circ}, -30^{\circ}, -15^{\circ}, 0^{\circ}, 15^{\circ}, 30^{\circ}, 45^{\circ}, 60^{\circ}, 75^{\circ}, 90^{\circ}$

Fig. 4.13 Output Power P_2

The previous waveforms show that the simulation results are in agreement with harmonic balance technique. When phase angle Φ_2 is equal to 30° and duty ratio $D_1 = 0.8$, $D_2 = 0.8$, the input current obtained from the simulation of the full order converter is shown in Fig. 4.16. It is observed that the waveform is not sinusoidal, with polluting higher order components. The presence of strong higher order harmonic currents which are not accounted in the HBT suggests an explanation for the lack of excellent correlation between the two results especially at relatively higher input and output currents.

4.3 Analysis of Third and Fifth Ripple Quantities

As mentioned in the former section, HBT can yield the equations with average and ripple components. Compared with the state space averaging method, it would be

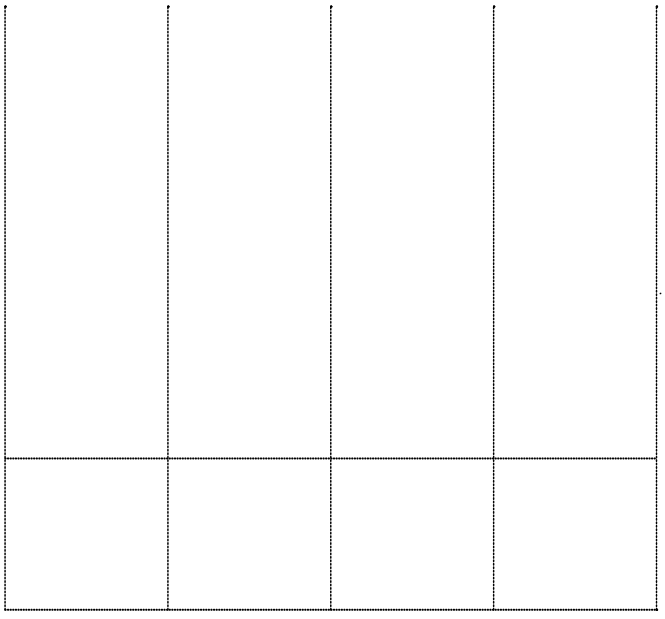

Fig. 4.16 Instantaneous input current i_1

easier to analyze and predict the characteristics of the higher order harmonic components.The ripple capabilities of filter capacitor and inductor design can be calculated. Therefore, the size and cost will be reduced due to the more precise selection of the components. In the following part, the third and fifth harmonic components will be discussed.

The derivations of the third harmonic ripples are shown as below. By using harmonic balance technique, the state variables and switching functions are assumed to have average components and third ripple quantities individually:

$_{1}\quad _{10}\ \mathrm{Re}[\ _{13}\ ^{3\theta f?}]$

At steady state, from (4.65) – (4.67), the derivatives

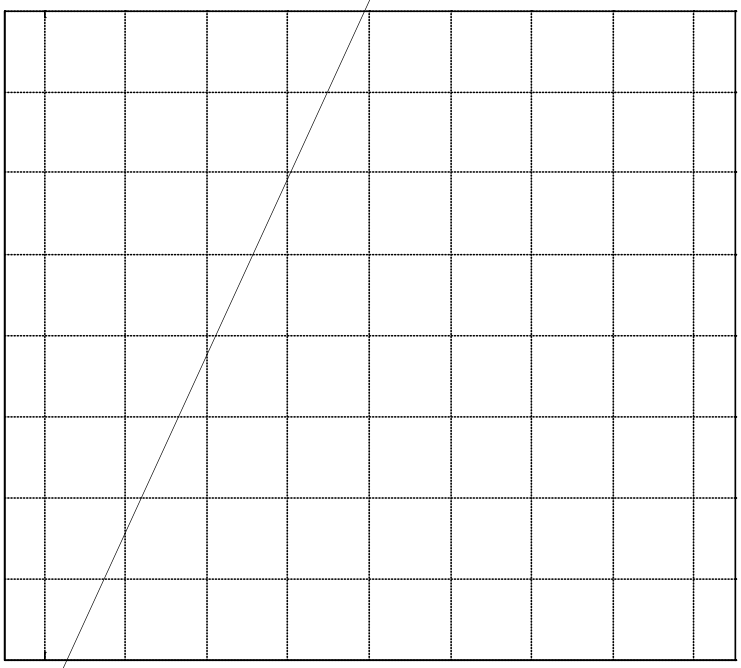

Fig. 4.20 Output power P_2

Fig. 4.21 Reactive power Q_1

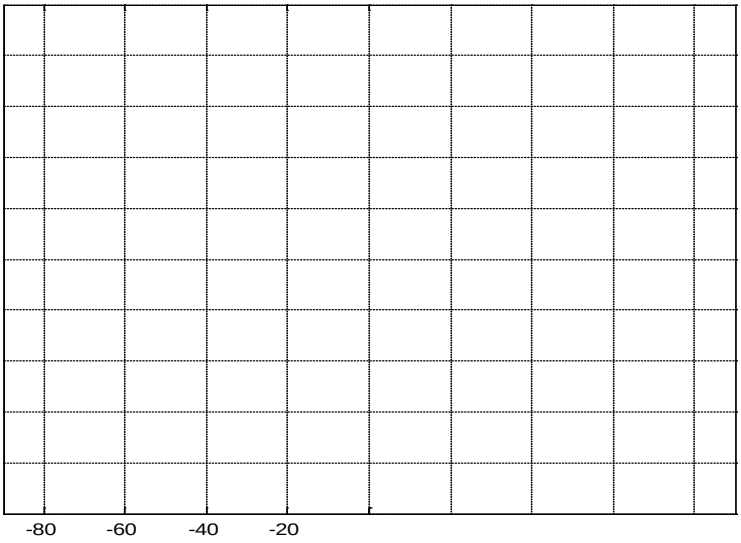

Fig. 4.22 Output dc voltage V_{dc}

Fig. 4.23 Input dc current I_{dc}

-20

4.4 Control Strategy of Reactive Power Minimization

Previous works are focused on small time scale control strategies. This section will present a new control strategy from the macroscopic perspective. It is based on the state variables derived from the HBT. In order to minimize the system power losses caused by reactive current flowing between the primary and the secondary converters, an optimization control strategy that dynamically determines the reference switching function command S_q and S_d required to achieve a high power efficiency (minimum peak current) is investigated.

This method uses a Lagrange multiplier to minimize the objective function which

$$P_1 = \frac{1}{\omega L}[V_{dc1}S_{q1}(V_{dc2}S_{d2} - V_{dc1}S_{d1}) + V_{dc1}S_{d1}(V_{dc1}S_{q1} - V_{dc2}S_{q2})^2] \tag{4.81}$$

Using the Lagrange multipliers optimization method, it can be shown that the input current is minimized for a given input power when the determinant is zero::

$$\Delta = \begin{vmatrix} \frac{\partial P_1}{\partial S_{q2}} & \frac{\partial P_1}{\partial S_{d2}} \\ \frac{\partial I^2}{\partial S_{q2}} & \frac{\partial I^2}{\partial S_{d2}} \end{vmatrix} = 0 \tag{4.82}$$

Solving the determinant of (4.82) and simplify the equation gives the defining equation as

$$\frac{V_{dc1}(S_{q1}{}^2 + S_{d1}{}^2)}{V_{dc2}} = (S_{q1}S_{q2} + S_{d1}S_{d2}) \tag{4.83}$$

By setting V

4.5 State Space Analysis Considering Dead Time Effect

Small signal analysis is well-known for studying the converter equivalent circuits.

(b)

(c)

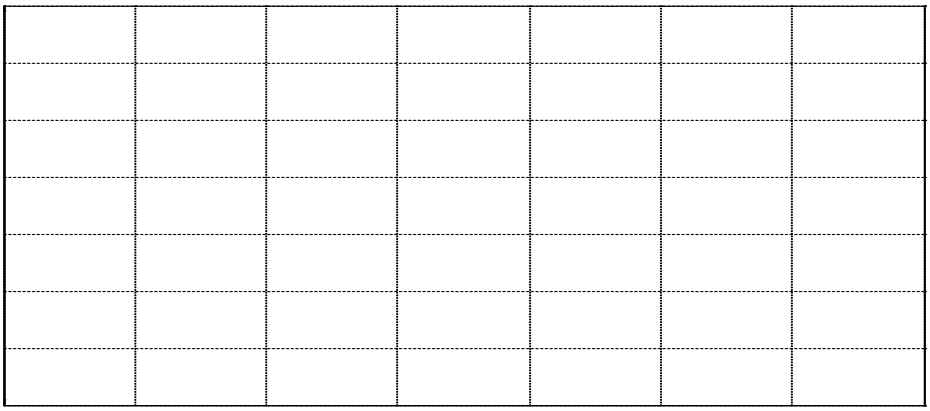

Fig. 4.25 Input current I vs. S_{d2} for obtaining minimum input current

variables can be separated in the dc terms and ac frequency terms. It can be described as

$$x = x_0 + \Delta x \tag{4.84}$$

where x_0 is the dc term, and Δx is the signal frequency term

The key theory is to replace the converter circuits with voltage and current sources to obtain a linear circuit. The initial waveforms of the voltage, current, duty ratio, and phase angle of the current state can be identical to the last value from last circuit state. By using this technique, the converter waveforms can be averaged over a small time instant. Hence any nonlinear elements can be linearized and perturbed.

In this section the proposed DAB system by using small signal analysis is studied. Perturbation method can be derived the circuit model equations. The q and d axis dynamic equations of the system are described in Equations (4.50) – (4.55). Hence, all the state variables can be redefined as

$$D_1 = D_{10} + \Delta D_1 \tag{4.85}$$

$$\phi_1 = \phi_{10} + \Delta\phi_1 \tag{4.86}$$

$$D_1 = D_{20} + \Delta D_2 \tag{4.87}$$

$$\phi_2 = \phi_{20} + \Delta\phi_2 \tag{4.88}$$

$$I_{q1} = I_{q10} + \Delta I_{q1} \tag{4.89}$$

$$I_{d1} = I_{d10} + \Delta I_{d1} \tag{4.90}$$

$$I_{q2} = I_{q20} + \Delta I_{q2} \tag{4.91}$$

$$I_{d2} = I_{d20} + \Delta I_{d2} \tag{4.92}$$

$$V_{dc0} = V_{dc00} + \Delta V_{dc0} \tag{4.93}$$

Substitute the Equations (4.85) – (4.93) into the Equations (4.50) – (4.55), the small signal model can be expressed as

(1) (10 1) (20 2) 1(10 1)

ω(1)(10 1) ω (20 2) $\frac{4}{\pi}\sin[\frac{\pi}{2}$(10 1)]sin[$\phi_{10}$ +$\omega\Delta\phi_1$]

( ) (2 20) (10 1)

2(20 2) (2)(20 2) (10 1)

$$\frac{16}{2}\frac{}{2}\sin^2[\frac{}{2}(\ 20\ \ 2)]\sin(\ 20\ \ 2)\cos(\ 20\ \ 2)(\ 20\ \ 2)$$

$$\frac{16}{2}\frac{}{2}\sin^2[\frac{}{2}(\ 20\ \ 2)]\cos^2(\ 20\ \ 2)(\ 20\ \ 2)$$

$$Cp\Delta V_{dc2} + \frac{\Delta V_{dc2}}{R} = -\frac{1}{2}\frac{4}{\pi}[\Delta I_{q2}\sin\frac{\pi}{2}D_{20}\sin\phi_{20} + \Delta I_{d2}\sin\frac{\pi}{2}D_{20}\cos\phi_{20}$$
$$+\Delta D_2\frac{\pi}{2}\cos\frac{\pi}{2}D_{20}(\sin\phi_{20}I_{q20} + \cos\phi_{20}I_{d20}) + \Delta\phi_2\sin\frac{\pi}{2}D_{20}(\cos\phi_{20}I_{q20} - \sin\phi_{20}I_{d20}) \quad (4.102)$$

Combining the Equations (4.98) –(4.102), the linear small signal model of equations above can be written as

$$\begin{bmatrix} \\ \\ \\ \\ \\ \end{bmatrix} = -\begin{bmatrix} \Delta \\ \Delta \\ \Delta \\ \Delta \\ \Delta \end{bmatrix} - \begin{bmatrix} \Delta \\ \Delta \\ \Delta \\ \Delta \\ \Delta \end{bmatrix}$$

$$=\begin{bmatrix} -\frac{4}{}\sin(\frac{1}{2})\sin\ _1, \frac{-4}{}\sin\ _1\cos(\frac{1}{2})-\frac{-4}{2}\sin(\frac{1}{2})\cos\ _1, & 0, & 0 \\ -\frac{4}{}\sin(\frac{1}{2})\cos\ _1, \frac{-4}{}\cos\ _1\cos(\frac{1}{2})-\frac{4}{2}\sin(\frac{1}{2})\sin\ _1\ , & 0, & 0 \\ 0, \quad 0, \quad 0, \quad \frac{16}{2^{\ 2}}\sin(\ \ _2)\frac{}{2}(\ _2\sin^2\ _2+\ _2\frac{\sin 2\ _2}{2}), \frac{16}{2^{\ 2}}\sin^2(\frac{2}{2})(\ _2\sin 2\ _2+\ _2\cos 2\ _2) & & \\ 0, \quad 0, \quad 0, \quad \frac{16}{2^{\ 2}}\sin(\ \ _2)\frac{}{2}(\ _2\frac{\sin 2\ _2}{2}+\ _2\cos^2\ _2), \frac{16}{2^{\ 2}}\sin^2(\frac{2}{2})(\ _2\cos 2\ _2-\ _2\sin 2\ _2) & & \\ 0, \quad 0, \quad 0, \quad \frac{1}{2}\frac{4}{}\cos(\frac{2}{2})\frac{}{2}(\ _2\sin\ _2+\ _2\cos\ _2)\ , \frac{1}{2}\frac{4}{}\sin(\frac{2}{2})(\ _2\cos\ _2-\ _2\sin\ _2) & & \end{bmatrix}$$

CHAPTER 5

MULTIPORT BIDIRECTIONAL DC-DC CONVERTER SYSTEM

5.1 Introduction

Recent development in renewable energy system needs to interface a variety of alternative power sources such as solar panels, fuel cells, and wind turbines. Meanwhile

high frequency transformer can be presented to be the solution due to its advantage of compactable size and possible multiple winding systems.

5.2 Multiport Bidirectional DC-DC Converters

A multiport converter structure with many ports to which sources or loads can be connected as shown in Fig. 5.1. The multiport topology has some advantages such as bidirectional power flow, centralized control between the ports, galvanic isolation, different voltage magnitudes of ports, and compact size of the converter. For example, in the applications of renewable energy regeneration systems, fuel cell system are always operated with accompany of low voltage batteries or supercapacitors. Because fuel cells have low response due to the electrochemical reactions, the power supplying by fuel cells cannot match transients of dynamic power. Hence, the deficiency or surplus power must be supplied by extra energy systems such as batteries or supercapacitors.

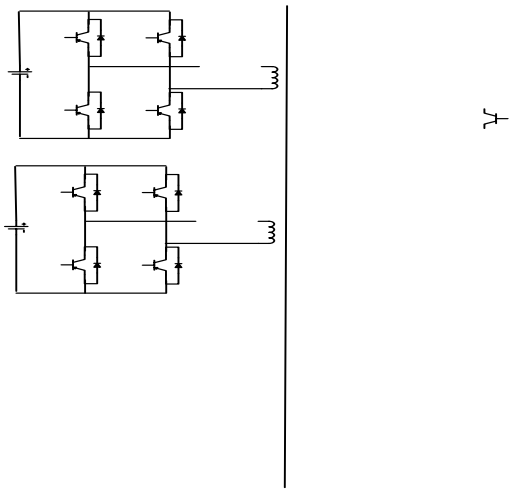

The capacitor and load model is represented by the following current equation:

$$CpV_{dcL} = -i_3' s_3 - \frac{V_{dcL}}{R} \tag{5.4}$$

The input voltage can be figure by

$$v_1 = V_{dcs1} s_1 \tag{5.5}$$

$$v_2' = V_{dcs2} s_2 \tag{5.6}$$

where i_1, i_2' and i_3' are the currents of each port, r_1, r_2 and r_3 are transformer resistances, L_1, L_2' and L_3' are transformer leakage inductances, L_m are transformer mutual inductance, C is output capacitance, R is the output resistive load, v_1, v_2' and v_3' are ac voltages of each port going through the single-phase converter. V_{dcs1}, V_{dcs2} and V_{dcL} are the dc voltages going into the single-phase converter. s_1, and are the switching functions for primary and secondary and third side converters.

The state variables and the switching functions are assumed to have average and ripple components. The switching function of single-phase converter is rectangular pulse with variable duty ratio and variable phase shift angle.

By using harmonic balance technique in Equations (5.1)- (5.6), all the state variables can be separated into two components which are average quantities and ripple quantities individually. All the state variables are expressed as

(5.7)

(5.8)

(5.9)

(5.10)

(5.11)

(5.12)

(5.13)

Substituting the equations above into dynamic Equations (5.1)-(5.6)

(5.14)

(5.15)

(5.16)

The capacitor and load model is represented by the following current equation:

(517)

The input voltage of Port 1 can be calucated by

(5.18)

The input voltage of Port 2 can be gotten by

(5.19)

When the system comes into steady state, the derivatives of the state variables are all equal to zero. Also the average components of , , , , and are all equal to 0. The peak value of fundamental components from ripple equations can be used to study the characteristic and performance of the system. Hence the peak fundamental component equations are used as below:

1 (5.20)

(5.21)

(5.22)

(5.23)

Because out ac voltage contains the real value of the multiplication by two complex components, it is feasible to separate into q and d axis variables which can make equations of state variables in the linear way.

Set

(5.24)

(5.25)

(5.26)

(5.27)

(5.28)

(5.29)

Bring the complex expressions into the matrix above and separate them into real and imaginary part, rearrange the equations:

(5.30)

(5.31)

(5.32)

(5.33)

$$r_3' I_{q3} - \omega(L_3'+L_m) I_{d3} - \omega L_m I_{d1} - \omega L_m I_{d2} = -\frac{1}{2} R[I_{q3} S_{q3} + I_{d3} S_{d3}] S_{q3} \tag{5.34}$$

$$r_3' I_{d3} + \omega(L_3'+L_m) I_{q3} + \omega L_m I_{q1} + \omega L_m I_{q2} = --\frac{1}{2} R[I_{q3} S_{q3} + I_{d3} S_{d3}] S_{d3} \tag{5.35}$$

The matrix can be gotten as follows:

$$\begin{bmatrix} r_1 & -\omega(L_1+L_m) & 0 & -\omega L_m & 0 & -\omega L_m \\ \omega(L_1+L_m) & r_1 & \omega L_m & 0 & \omega L_m & 0 \\ 0 & -\omega L_m & r_2 & -\omega(L_2'+L_m) & 0 & -\omega L_m \\ \omega L_m & 0 & \omega(L_2'+L_m) & r_2 & \omega L_m & 0 \\ 0 & -\omega L_m & 0 & -\omega L_m & \frac{1}{2} R S_{q3}^{\ 2} + r_3 & \frac{1}{2} R S_{q3} S_{d3} - \omega(L_3'+L_m) \\ \omega L_m & 0 & \omega L_m & 0 & \omega(L_3'+L_m) + \frac{1}{2} R S_{q3} S_{d3} & \frac{1}{2} R S_{d3}^{\ 2} + r_3 \end{bmatrix} \begin{bmatrix} I_{q1} \\ I_{d1} \\ I_{q2} \\ I_{d2} \\ I_{q3} \\ I_{d3} \end{bmatrix} = \begin{bmatrix} V_{dcs1} S_{q1} \\ V_{dcs1} S_{d1} \\ V_{dcs2} S_{q2} \\ V_{dcs2} S_{d2} \\ 0 \\ 0 \end{bmatrix}$$

(5.36)

Compared with the fundamental component of the system, the high order harmonic ripple components of the system can be calculated by the equations below. For the high order ripple components of capacitor side:

$$Cp(V_{dc0} + \mathrm{Re}[V_{dc1} e^{j2\theta}]) = -\mathrm{Re}[I_3 e^{j\theta}] * \mathrm{Re}[S_3 e^{j\theta}] - \frac{V_{dc0} + \mathrm{Re}[V_{dc1} e^{j2\theta}]}{R_l} \tag{5.37}$$

For the ripple part

$$\mathrm{Re}[CpV_{dc1} e^{j2\theta} + 2Cj\omega V_{dc1} e^{j2\theta}]) = -\frac{1}{2}\mathrm{Re}[I_3 S_3 e^{j2\theta}] - \frac{\mathrm{Re}[V_{dc1} e^{j2\theta}]}{R_l} \tag{5.38}$$

Delete $\mathrm{Re}[e^{j2\theta}]$ part, ripple peak value of high order components can be gotten as below:

$$CpV_{dc1} + 2C * j\omega V_{dc1} = -\frac{1}{2} I_3 S_3 - \frac{V_{dc1}}{R_l} \tag{5.39}$$

For the expression of switching function:

(5.40)

The initial phase angle is expressed as follows:

(5.41)

So, (5.42)

5.4 Minimization of Three-Port Converter System

on the load requirements and makes the galvanic isolation. Also, the leakage inductances of each port winding play an important role in transferring the power among the three ports.

In the following sections, modeling of the three-port system, description of the minimization of the reactive power flow using langrange multiplier, and Gröbner basis introduction are reviewed, respectively.

5.4.1 Modeling of the Three-Port Bidirectional DC-DC Converter System

Conceptually, the equivalent circuit can be viewed as a grid of inductors including the leakage, external inductors and magnetizing inductance driven by controllable rectangular waveforms. The network can be represented on the three leakage inductances and mutual inductance to study the power flow of the three-port bidirectional dc-dc converter system. To illustrate the operation of the system, Fig. 5.3 shows the ideal simplified three-port system. The variable magnitude of voltage sources are phase shifted to regulate the corresponding power flow among the three ports. Hence the modeling of

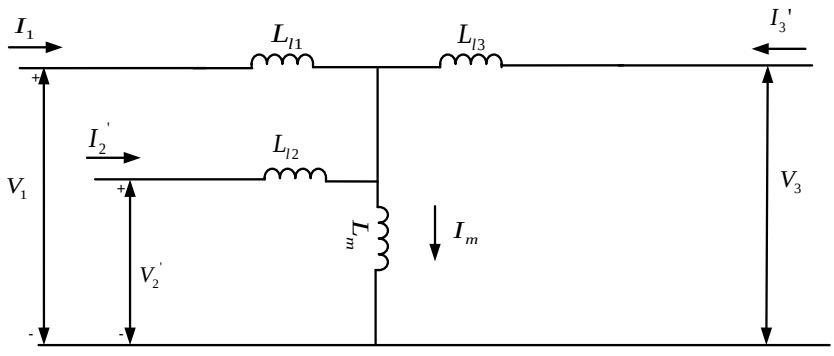

Fig. 5.3 Simplified model of equivalent circuit of three-port converter system

the three-port system can be analyzed based on the major power transferring components leakage inductances on each side. According to the descriptions above, it comes to the equations below:

(5.48)

Set

Then, solve the equation above to get the current expression:

(5.49)

The current I_i can be found as below:

(5.50)

Because the ac current contains real part and complex part, it is possible to decompose the state variables into *q* and *d* components, which can linearize the equation above. It is assumed that $I_i = I_{qi}+I_{di}$. Thus

(5.51)

(5.52)

5.4.2

In a practical system, the power flow control can be implemented to regulate the ports' voltage, current, and power according to the system's specifications. If phase angle Φ_1 are set as reference, Φ_2 and Φ_3 are compared with Φ_1 either lagging or leading, Also duty ratio D_1 is fixed. Here the load port is power regulated. The real power P_3 can be desired and calculated as follows:

$$P_3 = V_3' I_3'^* = \mathrm{Re}[V_{dc3}'(S_{q3} + jS_{d3})(I_{q3}' - jI_{d3}')] = V_{dc3}'(S_{q3} I_{q3}' + S_{d3} I_{d3}') \tag{5.55}$$

Substituting S_{q1} and S_{d1} into the equation above,

$$P_3 = V_{dc3}'(S_{q3}[1.27 b_{31} V_{dc1} + b_{32} V_{dc2}' S_{d2} + b_{33} V_{dc3}' S_{d3}] - S_{d3}[b_{32} V_{dc2}' S_{q2} + b_{33} V_{dc3}' S_{q3}] \tag{5.56}$$

Based on the KCL rule, the magnetizing current can be expressed as

$$I_m = I_1 + I_2 + I_3 \tag{5.57}$$

To produce the certain output power P_3 for a given input voltage V_1,there are numerous choices for I_{qi} and I_{di}, however the minimal value of the summation of the currents I

currents and the real power output of port three are nonlinear equations. It is clear that the process of determining the minimum value of summation of currents is to deal with the objective function with a set of unknown variables using nonlinear programming techniques to satisfy all constraints.

The control objective function of the minimization is shown as below. The reactive power minimization is formulated as

Minimize $\sum I^2 = (I_{q1}+I_{q2})^2+(I_{q1}+I_{q3})^2+(I_{q2}+I_{q3})^2+(I_{d1}+I_{d2})^2+(I_{d1}+I_{d3})^2+(I_{d2}+I_{d3})^2$ (5.62)

Subject to the following:

The output power P_3 is the design specification. The control variables should be determined such that it generates the specified power at the output. The expression of the equality constraint is

$$P_3 = V_{dc3}'(S_{q3}[1.27b_{31}V_{dc1}+b_{32}V_{dc2}'S_{d2}+b_{33}V_{dc3}'S_{d3}]-S_{d3}[b_{32}V_{dc2}'S_{q2}+b_{33}V_{dc3}'S_{q3}] \quad (5.63)$$

The switching functions also have their own limits. The PWM pulse operated is rectangular waveforms. Using Fourier analysis, the switching functions of the fundamental component can be represented as

$$S_{qi} = \frac{4}{\pi}\sin(\frac{D_i}{2}\pi)\sin(\phi_i) \quad i=1,2 \quad (5.64)$$

$$S_{di} = \frac{4}{\pi}\sin(\frac{D_i}{2}\pi)\cos(\phi_i) \quad i=1,2 \quad (5.65)$$

where D_i is the duty ratio and Φ_i is phase shift angle.

So the inequality constraint can be constructed:

$$_2^2 + \quad _2^2 \leq (\frac{4}{\pi})^2$$

The concept of the Gröbner basis (GB) [56] was introduced in 1965 by Austrian researcher Bruno Buchberger named after his advisor W. Gröbner. The GB provides a uniform approach to solving a wide range problems expressed in terms of sets of multivariate polunomials. GB method can be a powerful mathematical tool to solve the nonlinear polynomial equations. It can turn a group of high coupled equations into uncoupled equations based on the selection of different basis. Also, some coefficients of the nonlinear equations can be set as unknown except the original unknown variables. The influence of the coefficients of the system can be studied using Gröbner basis method whereas the numerical iterative methods cannot do the job.

To begin with the GB technique, the concepts of ideal and generating set have to be known at first. Set $k[x_1, x_2, ...x_n]$ as a polynomial ring over the field k. An ideal is defined as $I \subset k[x_1, x_2, ...x_n]$ under the conditions below

(i) $0 \in I$

(ii)if $f, g \in I$, then $f + g \in I$

(iii) if $f, g \in I$ and $h \in k[x_1, x_2, ..., x_n]$, then $hf \in I$

Another indication of the role played by ideal is the affine variety. If $f_1, f_2, ..., f_s$ and $g_1, g_2, ..., g_t$

if in the vector difference $\alpha - \beta \in Z_{\geq 0}^{n}$, the left-most nonzero entry is positive. Write $x^{\alpha} >_{lex} \beta$

(ii) Graded Lexico Order - Let $\alpha, \beta \in Z_{\geq 0}^{n}$. It is said $\alpha >_{lex} \beta$, if $|\alpha| = \sum_{i=1}^{n} \alpha_i > |\beta| = \sum_{i=1}^{n} \beta_i$, or |

(,)

$S_{q3} = 0$, S_{d3}

the load system. The energy source could be any kinds of dc renewable source. The energy backup is usually selected among the batteries and supercapacitors.

In this section, a four-port bidirectional dc-dc converter system is presented. It is particular interesting for the on-site, small scale, residential power generation system where a variety of renewable energy sources are combined and many energy storage sources are available together. The subject is devoted to the design and analysis of a four-port isolated bidirectional dc-dc converter system shown in Fig. 5.6 feeding by an alternative energy source, a auxiliary energy storage

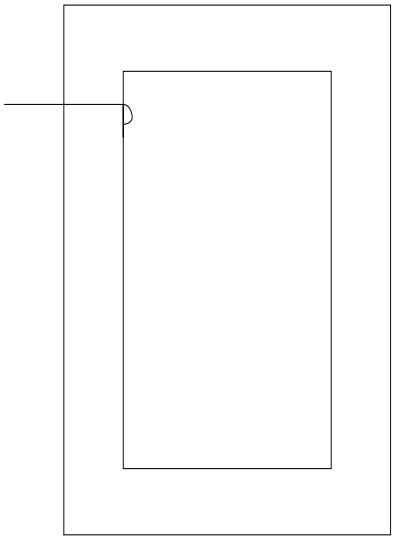

$$\phi_2 = \phi_{l2} + \phi_{m2} + \phi_{m1} + \phi_{m3} + \phi_{m4} \tag{5.88}$$

$$\phi_3 = \phi_{l3} + \phi_{m3} + \phi_{m1} + \phi_{m2} + \phi_{m4} \tag{5.89}$$

$$\phi_4 = \phi_{l4} + \phi_{m4} + \phi_{m1} + \phi_{m2} + \phi_{m3} \tag{5.90}$$

The general voltage equation is

$$V = rI + \frac{d\lambda}{dt} \tag{5.91}$$

Hence the voltage equation of each winding is expressed as

$$_1 = \frac{N_1 I_1}{R_{l1}} + \frac{N_1 I_1}{R_m} + \frac{N_2 I_2}{R_m} + \frac{N_3 I_3}{R_m} + \frac{N_4 I_4}{R_m}$$

$$\begin{bmatrix}\lambda_1\\ \lambda_2\\ \lambda_3\\ \lambda_4\end{bmatrix}=\begin{bmatrix}L_{11} & L_{12} & L_{13} & L_{14}\\ L_{21} & L_{22} & L_{23} & L_{24}\\ L_{31} & L_{32} & L_{33} & L_{34}\\ L_{41} & L_{42} & L_{43} & L_{44}\end{bmatrix}\begin{bmatrix}I_1\\ I_2\\ I_3\\ I_4\end{bmatrix} \tag{5.111}$$

Refer all the other 2, 3, 4 Coils to 1 side and use the same mutual inductance L_{m1}

$$\lambda_1 \quad L_{l1}I_1 \quad L_{m1}[I_1 \quad \frac{N_2}{N_1}I_2 \quad \frac{N_3}{N_1}I_3+\frac{N_4}{N_1}I_4] \tag{5.112}$$

$$\lambda_2 \quad {}_{l2\ 2} \quad {}_{m2}[\ {}_{2} \quad \frac{1}{2}\ {}_{1} \quad \frac{3}{2}\ {}_{3}+\frac{4}{2}\ {}_{4}] \tag{5.113}$$

$$\lambda_3 \quad L_{\ 3}I_3 \quad L_{\ 3}[I_3 \quad \frac{N_1}{N_3}I_1 \quad \frac{N_2}{N_3}I_2+\frac{N_4}{N_3}I_4] \tag{5.114}$$

$$\lambda_4 \quad L_{\ 4}I_4 \quad L_{\ 4}[I_4 \quad \frac{N_1}{N_4}I_1 \quad \frac{N_2}{N_4}I_2+\frac{N_3}{N_4}I_3] \tag{5.115}$$

$$I_2^{'}=\frac{N_2}{N_1}I_2,\quad I_3^{'}=\frac{N_3}{N_1}I_3,\quad I_4^{'}=\frac{N_4}{N_1}I_4 \tag{5.116}$$

$$L_m \quad \frac{N}{N}L_m\ ,L_m \quad \frac{N}{N}L_m\ ,L_{m4} \quad \frac{N_4^{\ 2}}{N_1^{\ 2}}L_{m1} \tag{5.117}$$

Substitute (5.112) – (5.115) using (5.116) and (5.117):

$$'\quad[\quad {}^{'m}\quad {}_{3}^{\ '}\quad {}_{4}^{\ '}]$$

(5.117/P <0020>Ti35T EMC O-/1T'w Td (3) 04 Tc 3ereTi 150 Tc 3 Tw 1(5.117:

Hence the equations of four winding transformer system can be expressed as below:

$$V_1 \quad r_1 I_1 \quad \frac{d \ _1}{dt}$$

Define

$= V \cdot S - dcS$

The input voltage can be derived by (5.134)

(5.135)

R_3=5Ω and R_4=10Ω. In this simulation case, the duty ratios and phase angles of each port are listed in Table 5.4.

The simulation results are as shown in Fig. 5.10, Fig. 5.11 and Fig. 5.12. The output Port 3 and Port 4 dc voltages V_{dc3} and V_{dc4} are expressed as follows:

Table 5.3 Parameters for the four winding transformer

	Winding 1	Winding 2	Winding 3	Winding 4
Resistance	0.03 Ω	0.005Ω	0.002Ω	0.005Ω
Leakage inductance	210μH	4950nH	550nH	4500nH
Mutual inductance	1mH	1mH	1mH	1mH
Turn ratio	1	3/20	1/20	3/20

Table 5.4 Parameters of control variables for four DAB converter system

Control parameters	Port 1	Port 2	Port 3	Port 4
Duty ratio (Di)	D_1=0.8	D_2=0.8	D_3=0.8	D_3=0.8
Phase angle (Φ_i)	Φ_1=0°	Φ_2=15°(lagging)	Φ_3=30°(lagging)	Φ_4=45°(lagging)

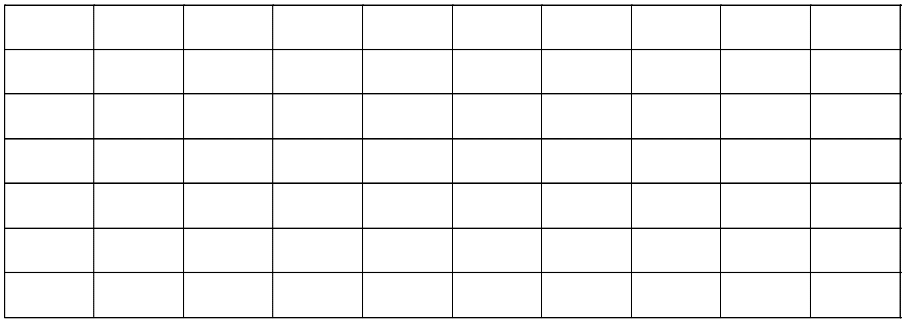

Fig. 5.10 DC output voltages of Port 3 and Port 4

The ac voltages between phase leg points for V_1, V_2', V_3' and V_4' are shown:

Fig. 5.11 Output voltages for four single-phase converters

The ac port currents going through transformer i_1, i_2', i_3' and i_4' are shown:

converter is rectangular pulse with variable duty ratio and variable phase shift angle. The equivalent circuit can be drawn in Fig. 5.13.

For the four-port transformer side:

$$(L_1 + L_m)pI_1 + L_m(pI_2^{'} + pI_3^{'} + pI_4^{'}) + (r_1 + j\omega(L_1 + L_m))I_1 + j\omega L_m(I_2^{'} + I_3^{'} + I_4^{'}) = V_1 \qquad (5.140)$$

$$3 \quad 4 \quad 2$$

When the system comes into steady state, the derivatives of the state variables are equal to zero. Also the average components of I_{10}, I_{20}, I_{30}, I_{40}, S_{10}, S_{20}, S_{30}, S_{40} are equal to

$$\frac{4}{}\sin(\frac{}{2})\cos(\quad)$$

Φ_2=30° (lagging). Port 3: R_3=5Ω, D_3=0.8, Φ_3=15°, 30°, 45°, 60°, 75° (lagging). Port 4: R_4=10Ω, D_4=0.8, vary Φ_4 from 0° to 90°.

By varying the phase angle when fixed duty ratio of each converter, it is possible to solve the matrix above to get the steady state solutions as shown below. The steady state analysis based on the output load voltage V_{dc3} and V_{dc4}, real input and output power P_1, P_2 are laid out. The influence of phase shift angle $\Phi_4$dc on output voltage V_{dc3} and the input power are shown from Fig. 5.14 to Fig. 5.15.

From the these figures, it can be observed that the value of real power flow becomes larger as phase shift is increasing to some point. After the specific angle, the real power input will be decreased. It clearly shows that the system can draw more reactive power when phase shift angle is leading. To minimize the reactive power in the system, it is better to set a constraint region for phase shift angle which can get minimum loss. Therefore limiting the phase angle range, it can increase the overall system efficiency.

5.5.4 Minimization of Reactive Power for Four-Port DAB Converter System

In the former sections, the optimal design of three-port bidirectional DAB converter system was carried out to acquire the operating control conditions to achieve the minimum reactive power flow among the three ports. The results are verified with simulation results. In this section, the problem of minimization of reactive power can be extended to be applied in four-port DAB converter system. Although the equations of

where

$$= \begin{bmatrix} (\ _1 + \ _m) & \ _m & L_m & L_m \\ L_m & (L_2 + L_m) & L_m & L_m \\ L_m & L_m & (L_3 + L_m) & L_m \\ L_m & L_m & L_m & (L_4 + L_m) \end{bmatrix}$$

angle of the major power supply Port 1 can be $D_1 = 1$ and $\Phi_1 = 0°$. Correspondingly, the switching function $S_{q1} = 0$ and $S_{d1} = 1.27$.

$$I_{qi} = 1.27 b_{i1} V_{dc1} + b_{i2} V_{dc2} S_{d2} + b_{i3} V_{dc3} S_{d3} + b_{i4} V_{dc4} S_{d4} \tag{5.179}$$

$$I_{di} = -[b_{i2} V_{dc2} S_{q2} + b_{i3} V_{dc3} S_{q3} + b_{i4} V_{dc4} S_{q4}] \tag{5.180}$$

where S_{q2}, S_{d2}, S_{q3}, S_{d3}, $S_{q4,}$ and S_{d4} are unknown.

In a practical system, the power flow of the load side can be regulated to the system's specifications. The objective is to manage the output power of each load port. Therefore the realpower P_3 can be calculated as follows:

Re[(3)(3 3)] 3(3 3 3 3)

For this system, it is also formulated with some constraints imposed on the control variables. The Lagrange optimization of such problem has to be carried out within the limits of these constraints. Using Equations (5.59) – (5.61), the function of Lagrange can be defined. The control objective function of the minimization is shown as below. The reactive power minimization is formulated as

$$\begin{aligned} F &= I_1^{\,2} + I_2^{\,2} + I_3^{\,2} + I_4^{\,2} + I_m^{\,2} = (I_1 + I_2)^2 + (I_3 + I_4)^2 + (I_1 + I_3)^2 + (I_2 + I_4)^2 + 2I_2I_3 + 2I_1I_4 \\ &= I_{q1}^{\,2} + I_{q2}^{\,2} + I_{q3}^{\,2} + I_{q4}^{\,2} + (I_{q1} + I_{q2} + I_{q3} + I_{q4})^2 + I_{d1}^{\,2} + I_{d2}^{\,2} + I_{d3}^{\,2} + I_{d4}^{\,2} + (I_{d1} + I_{d2} + I_{d3} + I_{d4})^2 \\ &= (I_{q1} + I_{q2})^2 + (I_{q3} + I_{q4})^2 + (I_{q1} + I_{q3})^2 + (I_{q2} + I_{q4})^2 + 2I_{q2}I_{q3} + 2I_{q1}I_{q4} \\ &+ (I_{d1} + I_{d2})^2 + (I_{d3} + I_{d4})^2 + (I_{d1} + I_{d3})^2 + (I_{d2} + I_{d4})^2 + 2I_{d2}I_{d3} + 2I_{d1}I_{d4} \end{aligned} \tag{5.187}$$

Subject to equality constraints where are Equations (5.183) and (5.184). Also, the inequality constraints are the maximum magnitude of the switching functions as can be seen in (5.64) – (5.65). Therefore the description of Lagrange function is stated as

$$\begin{Bmatrix} \\ \\ \end{Bmatrix} \quad \begin{Bmatrix} \\ \\ \end{Bmatrix}$$

where K_{i1}, K_{i2}, K_{i3} and K_{i43} are defined by,

$$_1 = 1.27 \quad _1 \quad _1 \quad _2 = \quad _2 \quad _2, \quad _3 = \quad _3 \quad _3, \quad _4 = \quad _4 V \quad _4, i = 1,2,3,4$$

CHAPTER 6

IMPLEMENTATION OF THE DAB CONVERTER SYSTEM

6.1 Introduction

In this chapter, the design of the proposed bidirectional dc-dc DAB converter system is presented and the core components design procedure detailed. The topology of the DAB converter system has been already introduced in the former sections. Several analytic methods have been used to study the steady state and dynamic performance of the system. The structure of the DAB converter system is composed of single-phase full bridge converters including the power stage design and drive circuit design. Also, high frequency transformer and extra inductors are the key components to transfer the corresponding desired power. The peripheral of the control system contains DSP microcontroller, current and voltage sensors.

This converter should be used in middle power operation such as 500 W to 2 KW. The transformer is needed for boosting or isolating the input voltage from the secondary and third port voltages. High switching frequency is preferred to reduce the volume of the transformer core and size of the wires. Also, an extra inductor needs to be considered to meet the desired power transfer based on the power flow formulas. Additionally, the duty ratio and phase-shift control technique is introduced using DSP system. Hence in this chapter, the prototype of the hardware unit is design and the procedures of the key components are also included.

6.2 The Design of Power Stage and Driver Circuit

The primary goal of the DAB converter system is to generate the output voltage as twice the input voltage. The input voltage level is around 30 V. After the primary full H-bridge single-phase converter, the input dc voltage is converter to ac voltage with the maximum magnitude of 1.27 times of dc magnitude. Hence, the secondary side ac voltage should be around 80 V.

The semiconductor device is one of the most critical components in the DAB converter system. The proper selection of the device can be cost effective and improve the system's efficiency and durability. The most available parts in the market are IGBTs and power MOSFETs. IGBT is preferably used in the high voltage high current situation because the voltage drop of the IGBT is constant when the device is conducting. When

sg2(r)5(e)6(s)1(ou)2(r)5(.)2(Hc)4(e)6(n)2(c62(e)6tM)-1(O4

board used is two layers. The MOSFETs will be soldered on board. They are screwed on the heat sink below.

The schematic of the individual full-bridge inverter is shown in Fig. 6.1 below. It is composed of four discrete MOSFETs (STP40NF10), heat sink, terminal connecter and two-layer copper board. The drain-source resistance $R_{ds\text{-}on}$ is 25m Ohm which is acceptable in the proposed system.

There are some considerations while a full H-bridge Power MOSFET is designed. First of all, the gate voltage signal going to MOSFET gate must be clear and the transition between high and low must be as fast as possible. The higher the change of dV/dt and current dI/dt, the less power loss can be achieved. Also, the protection circuit needs to be considered in case of the 0 12 3Tj 0.0

Fig. 6.2 PCB layout of the individual single-phase inverter

The driver circuit design is based on the gate driver MC 33153 [53]. It is an IGBT

Fig. 6.4 Schematic of the MC33153 gate driver circuit

The connection between DSP and drive circuit must inserte opto-couplers to isolate and protect the DSP system if there are

Fig. 6.6 Configuration of the MC33153 gate driver's operation

For the design of the turn on resistor and turn off resistor of the gate driver circuit, the criteria for $R_{G\text{-}on}$ selection are large enough to damp the ringing and to reduce the noise and small enough to accelerate turn-on process and reduce the turn-on loss. Also, the criteria for $R_{G\text{-}}$

In the applications of H-bridge system, it may exist that the currents flowing through the power semiconductor devices exceed the desired capabilities. If the devices are not protected again these overcurrents, they may be destroyed. Usually the primary choice would be fuses connected in series with the main input circuit. However, the fuses cannot act fast enough to disconnect the circuit and the power devices may have been destroyed. Hence, the overcurrent protection can be detected by using the default protection function from the driver MC33153. A low resistance current shunt (5 Ω) can be used to sense the emitter current. When there is a high inrush current coming through, the short circuit discerned function is implemented by the second comparator with a high trigger voltage. The short circuit signal is latched and appears at the Fault output. After the signals from each driver circuit are detected, they are sent back to DSP controller and

The photograph of the prototype is displayed in Fig. 6.9. Fig, 6.9(a) shows the two full bridge converter system. The completely assembled system with protection circuit is shown in Fig. 6.9 (b), where the power stages with heat sink are mounted on the white board, the driver circuits, isolated power supplies, and protection circuits are connected on the top of the power stages.

Before giving the power supply to the H-bridge circuit, it is necessary to check if the power MOSFET can work at all. The single-phase inverter circuit is shown in Fig. 6.10. Switch the rotary knob of Fluke MULTIMETER to diode test. Push the blue button to dc volto10(t)t2on l1e21(T)-19(I)2(o di)n. CRo2(onnE)3

Fig. 6.11 Hardware test result demonstrating gate voltage V_G

The test results are from the built prototype circuit. It is composed of MC33153 driver and Power stage circuit. As can be seen from Fig. 6.11, the device drain-to-source voltage waveforms are very clean. The waveforms show the gate voltage V_G 18 V operating well.

increased and the influence of EMI interference will become more serious. Hence, the design of the high frequency transformer should transfer the rated power and converter the voltage at reasonable core and copper losses. Also, EMI should be prevented as much as possible. Because EMI can cause the disconnected communication between DSP control system and power stage. This can cause the damage of the semiconductor's devices. In this section, a two-

Step 1: Calculate the apparent power using Equation (6.1)

$$P_t = P_m + P_\Sigma \tag{6.1}$$

$$P_t = 1000/0.98 + 1000 = 2020W \tag{6.2}$$

Step 2: Calculate the area product using (6.3) and the result is in Equation (6.4)

$$A_p = \left| \frac{P_t * 10^4}{K_f B_m f K_u K_j} \right| \tag{6.3}$$

$$A_p = \left| \frac{2020 \cdot 10^4}{4 \cdot 0.3 \cdot 10000 \cdot 0.4 \cdot 534} \right| = 10.522 cm^4 \tag{6.4}$$

After A_p has been determined, the geometry of the transformer can be evaluated. The criteria of the selection of core is that the area product of the core is at least greater than the area product calculated by the apparent power. Among the different cores available in the market, EE ferrite core may be the one of the most efficient cores due to its larger window area and high magnetic permeability coupled with low electrical conductivity. Due to the available EE ferrite cores in the market, the specifications of the EE ferrite core chosen are listed in Table 6.2.

Table 6.2 Specifications of the magnetic core

Parameters	EE ferrite core 65/32/27

$$P_p = I_P{}^2 R_p \tag{6.15}$$

$$P_p = 33.4^2 \cdot 0.0023 = 2.56W \tag{6.16}$$

Step 9: Determine the number of the secondary turns N_s:

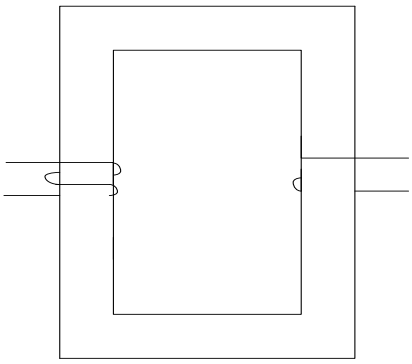

Fig. 6.15 Primary and Secondary voltages measured

Fig. 6.17 Transient change of low-side

As can be seen from the figures above, the transformer is operating at 10 kHz and step up the input voltage to twice as the output side which is expected.

6.4 Inductor Design

The auxiliary inductor is necessary to be added to the primary side of the transformer. The inductance in the operation of high frequency transformer DAB system is critical. When the system is operating at high frequency, the inductance composed of leakage inductance and extra inductance is taking an important role in managing the power flow between the primary and secondary side shown in Fig. 6.18.

Fig. 6.18 Inductance *L* in the operation of the proposed DAB system

The inductance *L* determines the maximum transient power the power source can supply. Because of the design of high frequency transformer, the leakage inductance is smaller and cannot be enough to handle the required power flow. It can result in a higher peak current. So it is necessary to add an external inductance to the proposed system. Hence, it should be designed such that it delivers the output power. The ac inductor is designed using the following procedure [54]. The specifications of are listed in Table 6.4.

Table 6.4 Specifications of the auxiliary inductor

Parameters	Value
Applied voltage V	25 V

Step 1: Calculate the apparent power P_t of the inductor L:

6.5 Implementation of DSP

The proposed phase shift PWM generation scheme for the DAB converter system is implemented with DSP controller system from Texas Instruments (TI) C2000 family. The phase shift PWM pulses are generated directly from an internal time event using TM320SF2812 shown in Fig. 6.20. This digital is usually a digital pulse with binary amplitude (0, 1). One (1) is usually 3.3 V and 0 is 0 V. All digital I/O ports can be grouped into Group GPIO A, B, D, E, F, and G. These GPIO ports mean general purpose input output. Also, for each single physical pin it can be used for two or three different special functions. The functions here are specified as PWM generation.

All six GPIO ports are controlled by their own multiplex register called GPxMUX. Writing 0 to the bit means choosing normal digital I/O function. Setting 1 to the bit means selecting special function also called primary function. When the digital I/O function is selected, then the register group GPxDIR defines the direction of I/O. writing 0 to pin means input. On (1) is chosen as output.

Fig. 6.20 DSP TM320SF 2812 control system

The CPU clock module is driven by an external crystal clock. The inner PLL circuit generates the speed by using the registers PCLKCR and HISPCP. Also, a watchdog timer has the function of resetting the C28x if the CPU crashes. The watchdog is always alive when DSP is power up so it must be taken care of. One of the simplest ways is to disable it. The register WDCR can be used to finish the setup. Also, the register SCSR controls whether the watchdog causes a Reset or an interrupt request.

The event manager (EV) shown in Fig. 6.21 is a unit that can be used in time-based procedures. The event manager timers units are usually called Time 1, 2, 3, and 4. These timers are completely different than CPU core Timers 0, 1, and 2. First, they have a 16-bit counter unit, whe1(o)-4(l m 1x2(p)-4(l)--4(l)-70etc 0 T)-2(mm)-4(tim(e1(o)-4 (is)1(a)-4(3h)-8

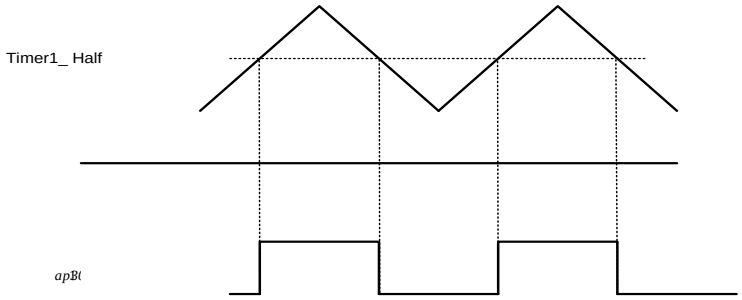
Timer1_ Half

much faster than the turn off time. When the high-side is commanded off, the falling edge cannot be going to zero simultaneously. At this moment the low-side is turned on. So it is possible that the rising edge of low-side

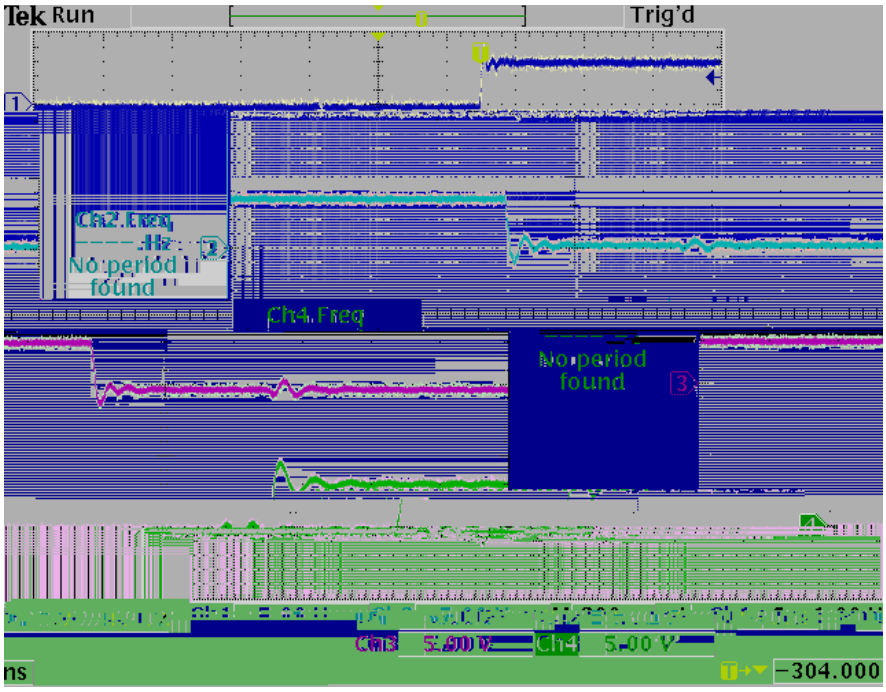

Fig. 6.26 Two pair of Complementary signals with 2% period dead band

Fig. 6.27 Hardware test result of H-bridge showing output voltage V_{AB} and gate voltage V_G

As can be seen from Fig. 6.28, the waveform shows the ac output voltage V_{AB} at 23 V from the inverter with 60 degree phase shift.

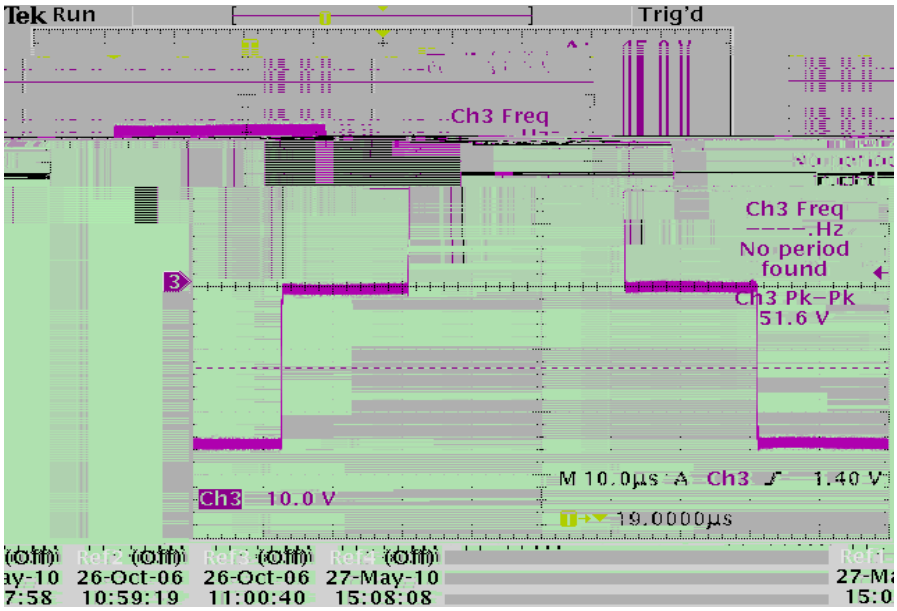

Fig. 6.28 60° phase shift rectangular PWM ac voltage waveform

CHAPTER 7

EXPERIMENTAL VERIFICATION OF THE PROPOSED

Power Circuit

Control Circuit

DSP

Terminal Box

MOSFET Gate
Driver Circuit

Fig. 7.2 Photograph of the two-port

Fig. 7.5 Experimental results of the steady state operation of the two-port DAB converter with $D_1 = 1$, $D_2 = 1$ $\Phi = 30°$, showing from top (4) Input ac voltage v_1 (50V/div); (2) Output voltage v_2 (50V/div); (M) Input instantaneous power P_1 (625W/div); (3) Input ac current i_1 (10V/div).

The power flow in response to the phase shift angle can be well explained both from the theoretical analysis and experimental results. The current transducer from LEM used is LA 55-P/SP1. The current rating75 t(an)-4(d)wu5m ( )T2 13/8 0 0 6.48T>BDC Tw 0.BD

7.2.2 Steady State Operation with Duty Ratios and Phase Shift Control

In order to gain more degrees of freedom for reducing the overall system losses, the duty ratio control of the full bridge output voltages v_1 and v_2 are introduced in

The previous theoretical analysis on the minimization of the reactive power in Chapter 4.4 is verified by the following experimental setup where the control parameters are derived from the Equation (4.83). With the electrical parameters given in the Chapter 4.4, Fig. 7.6 shows the measured steady state operation results, showing the voltage between the phase leg midpoints for each full bridge and the current flowing into the primary side of the transformer.

As can be seen, the input instantaneous power is examined to check the real and reactive power. The positive side of the red color line above the average is the real power and the negative side below the average is the reactive power. The circulating reactive power inside the high frequency transformer can be minimized.

Fig. 7.8 Experimental results of the steady state operation of the two-port DAB converter with $D_1 = 0.8$, $D_2 = 0.26$ $\Phi = 20°$, showing from top (4) Input ac voltage v_1 (50V/div); (2) Output voltage v_2 (50V/div); (M) Input instantaneous power P_1 (625W/div); (3) Input ac current i_1 (10V/div).

CHAPTER 8

CONCLUSION AND FUTURE WORK

8.1 Conclusion

This research work is dedicated to studying the steady state analysis and control of overall system efficiency optimization for two-port and multiport bidirectional DAB converter systems. The dissertation is concluded as follows:

1. In this dissertation, the extensive modeling and analysis using the state space method for two-port bidirectional DAB converter system. The objective is to ease the problem by simplifying the equations and the closed form solutions can be acquired based on different modes of operation. The state space method is a powerful mathematical tool which can make the nonlinear power switching system to be approximated as a linear system. Based on the state space method, the effect of the dead time between upper and lower switches on the DAB system has been introduced. The operation stages considering the dead time intervals are laid out to study the voltage drop of the semiconductor device. Furthermore, the small signal analysis of the two-port DAB converter system is derived clearly.
2. The approach using the c0o.fyi5(y)1dtSli iem the mceor heol3( )]TJ -4(n)-4(v1du)-10(c)2(

and inductor design can be calculated. Therefore, the size of the filter components can be reduced. A new control strategy from the macroscopic perspective based on the state variables derived from the HBT is used to minimize the reactive power caused by current circulating inside the transformer. This method uses Lagrange multiplier to minimize the objective function which is the least summation of the squares of the currents. The separate state variable equations generated using HBT is used to determine the minimum loss operation of proposed two-port DAB converter system.

3. To further address the advantage of HBT method, it can be also extended into multiport DAB converter system compared with the well-known averaging techniques such as state space method and transfer

5. The step-by-step hardware design of the proposed two-port DAB and multiple port DAB converter systems is shown clearly. The schematic and PCB layout of the individual

Analysis of the dynamic behavior of two-port DAB converter system has been studied. The interest would be to design the corresponding ac components controller designer based on natural reference frame.

Further research in the control design of multiport converters needs to be studied extensively. New decoupling control topologies should be designed.

The hardware design fLBody <</MC(r)3(e)g2(g)10(b4Tv -2(ul)-2(hody (e)4Snnve)4(r)3-4

REFERENCES

[1] G. Spagnuolo, G. Petrone, S. V. Araujo, C. Cecati, E. Friis-Madsen, E. Gubia, D. Hissel, M. Jasinski, W. Knapp, M. Liserre, P. Rodriguez, R. Teodorescu, and P. Zacharias, "Renewable Energy Operation and Conversion Schemes," *IEEE Industrial Electronics Magazine*, vol. 4, issue 1, Mar. 2010, pp. 38-51.

[2] J. M. Guerrero, F. Blaabjerg, T. Zhelev, K. Hemmes, E. Monmasson, S. Jemei, M. P. Comech, R. Granadino, and J. I. Frau, "Distributed Generation: Toward a New Energy Paradigm," *IEEE Industrial Electronics Magazine*, Vol. 4, Issue 1, Mar. 2010, pp. 52-64.

[3] Saifur Rahman, "Green Power: What Is It and Where Can We Find It?" *IEEE Power and Energy Magazine*, Vol. 1, Issue 1, Jan.-Feb., 2003, pp. 30-37.

[4] L. A. Barroso, H. Rudrick, F. Sensfuss, and P. Linares, "The Green Effect" *IEEE Power and Energy Magazine*, Vol. 8, Issue 5, Sept.-Oct., 2010, pp. 22-35.

[5] M. Liserre, T. Sauter, and J. Y. Hung, "Future Energy Systems: Integrating Renewable Energy Sources into the Smart Power Grid Through Industrial Electronics," *IEEE Industrial Electronics Magazine*, Vol. 4, Issue 1, Mar., 2010, pp. 18-37.

[6] J. Bebic, R. Walling, K. O'Brien, and B. Kroposki, "The Sun Also Rises" *IEEE Power and Energy Magazine*, Vol. 7, Issue 3, May-Jun., 2003, pp. 45-54.

[7] M. Shahidehpour and F. Schwarts, "Don't Let the Sun Go Down on PV," *IEEE Power and Energy Magazine*, Vol. 2, Issue 3, May-Jun., 2004, pp. 40-48.

[8] P. Thounthong, B. Davat, S. Rael, and P. Sethakul, "Fuel Cell High-Power Applications," *IEEE Industrial Electronics Magazine*, Vol. 3, Issue 1, Mar. 2009, pp. 12-17.

ATTORNEY DOCKET NO. 12 0 0 12 135

Dual-Phase-Shift Control," *IEEE Trans. Power Electron.*, Vol. 23, No. 6, Nov. 2008, pp. 2905-2913.

[12] Haimin Tao, Jorge L. Duarte, and Marcel A. M. Hendrix, "Three-Port Triple-Half-Bridge Bidirectional Converter With Zero-Voltage Switching," *IEEE Trans. Power Electron.*, Vol. 23, No. 2, Mar. 2008, pp. 782-792.

[13] Jorge L. Duarte, Marcel Hendrix, and Marcelo Godoy Simoes, "Three-Port Bidirectional Converter for Hybrid Fuel Cell Systems," *IEEE Trans. Power Electron.*, Vol. 22, No. 2, Mar. 2007, pp. 480-487.

[14] Rajesh Gopinath, Sangsun Kim, Jae-Hong Hahn, Prasad N. Enjeti, Mark B. Yeary, and Jo. W. Howze, "Development of a Low Cost Fuel Inverter System With DSP Control," *IEEE Trans. Power Electron.*, Vol. 19, No. 5, pp. Sept. 2004, 1256-1262.

[15] Changrong Liu, Amy Ridenour, and Jih-Sheng(Jason) Lai, "Modeling and Control of a Novel Six-Leg Three-Phase High-Power Converter for Low Voltage Fuel Cell Applications," *IEEE Trans. Power Electron.*, Vol. 21, No. 5, pp. Sept. 2006, 1292-1300.

[16] H. Matsuo, W. Lin, F. Kurokawa, T. Shigemizu, and N. Watanabe, "Characteristics of The Multiple-Input DC-DC Converter," *IEEE Trans. Ind. Electron.*, Vol. 51, No. 3, Jun. 2004, pp. 625-631.

[17] Lizhi Zhu, "A Novel Soft-Commutating Isolated Boost Full-Bridge ZVS-PWM DC-DC Converter for Bidirectional High Power Applications," *IEEE Trans. Power Electron.*, Vol. 21, No. 2, pp. Mar. 2006, 422-429.

[18] Mohamed Z. Youssef, Humberto Pinheiro, and Parveen K. Jain, "Self-Sustained Phase Shift Modulated Resonant Converters: Modeling, Design, and Performance," *IEEE Trans. Power Electron.*, Vol. 21, No. 2, Mar. 2006, pp. 401-414.

[19] Dehong Xu, Chuanhong Zhao, and Haifeng Fan, "A PWM Plus Phase-Shift Control Bidirectional DC-DC Converter," *IEEE Trans. Power Electron.*, Vol. 19, No. 3, pp. May. 2004, 666-675.

[20] Hua Bai, Chunting Chris Mi, and Sonya Gargies, "The Short-Time-Scale Transient Processes in High-Voltage and High-Power Isolated Bidirectional DC-DC Converters," *IEEE Trans. Power Electron.*, Vol. 23, No. 6, pp. Nov. 2008, 2648-2656.

[21] Sung Young Kim, Ilsu Jeong, Kwanghee Nam, and Hong-Seok Song, "Three-Port Full Bridge Converter Application as a Combined Charger for PHEVs," *IEEE Vehicular Power and Propulsion Conference*, Sept. 2009, pp. 461-465.

[34] Zhijun Qian, Osama Abdel-Rahman and Issa Batarseh, “An Integrated Four-Port DC/DC Converter for Renewable Energy Applications,” *IEEE Trans. Power Electron.*, Vol.25, No. 7, Jul. 2010, pp. 1877-1887.

[35] German G. Oggier, Guilermo O. Garcia and Alejandro R. Oliva, “Modulation Strategy to Operate the Dual Active Bridge DC-DC Converter Under Soft-Switching in the Whole Operating Range,” *IEEE Trans. Power Electron.*, Vol.26, No. 4, Apr. 2011, pp. 1228-1236.

[36] Mario Cacciato, Alfio Consoli, Rosario Attansio, and Francesco Gennaro, “Soft-Switching Converter with HF Transformer for Grid-Connected Photovoltaic Systems,” *IEEE Trans. Ind. Electron.*, Vol.57, No. 5, May. 2010, pp. 1678-1686.

[37] Yanhui Xie, Reza Ghaemi, Jing Sun, and James S. Freudenberg, “Implicit Model Predictive Control of A Full Bridge DC/DC Converter,” *IEEE Trans. Power Electron.*, Vol.24, No. 12, Dec. 2009, pp. 2704-2713.

[38] Yanhui Xie, Jing Sun, and James S. Freudenberg, “Power Flow Characterization of a Bidirectional Galvanically Isolated High-Power DC/DC Converter Over a Wide Operating Range,” *IEEE Trans. Power Electron.*, Vol.25, No. 1, Jan. 2010, pp. 54-66.

[39] Hua Bai, Ziling Nie, and Chris Mi, “Experimental Comparison of Traditonal Phase-Shift, Dual-Phase-Shift, and Model Based Control of Isolated Bidirectioanl DC-DC Converters,” *IEEE Trans. Power Electron.*, Vol.25, No. 6, Jun. 2010, pp. 1444-1449.

[40] Morten Nymand and Michael A. E Andersen, “High-Efficiency Isolated Boost DC-DC Converter for High-Power Low-Voltage Fuel-Cell Applications,” *IEEE Trans. Ind. Electron.*, Vol.57, No. 2, Feb. 2010, pp. 505-514.

[41] Dipankar De and Venkataramanan Ramanarayanan “A Proportional Multiresonant Controller for Three-Phase Four-Wire High-Frequency Link Inverter.,” *IEEE Trans. Power Electron.*, Vol.25, No. 4, Apr. 2010, pp. 899-906.

[42] D. De V. Ramanarayanan, “Improved Utilization of an HF Transformer in DC-AC Application,” *IET Power Electron.*, Vol.4. Iss. 5. May. 2008, pp. 508-515.

[43] Junggi Lee, Kwanghee Nam, Seoho Choi, and Soonwoo Kwon, “Loss-Modeling/TT2w 4.87 0

[42]62TJ /TT1 1 Tf 1.67 04Td ( )Tj /TT0 1 Tf 0.07 Tw 0.58 0 Td [(J)-4 giGn.